




Dell Precision 7710 Memory Module Replacement

Written By: Johnathan Hammond




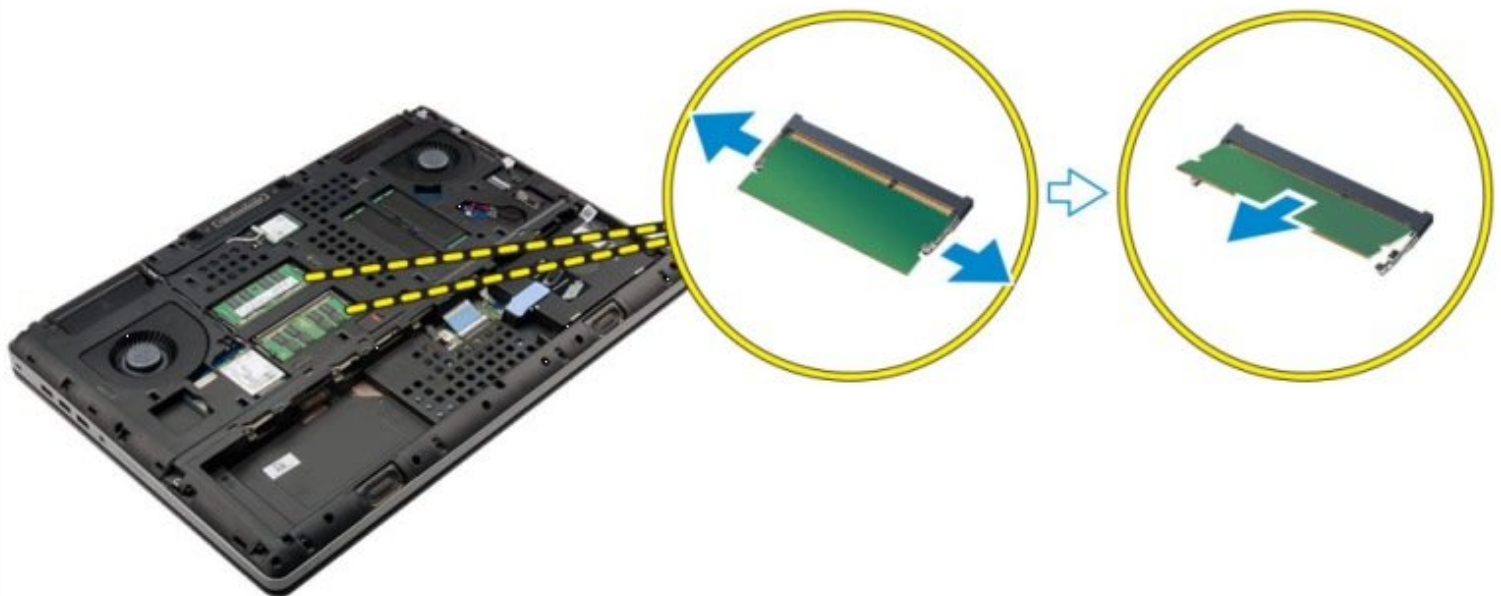

TOOLS:


- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery Cover

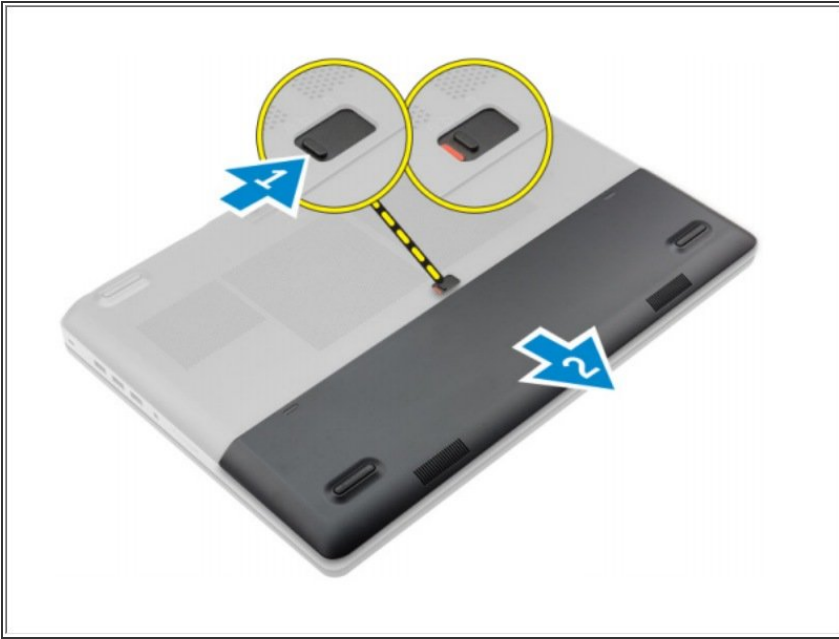


- Slide the release latch to unlock the battery cover [1].
- Slide and lift the battery cover to remove it from the computer [2].

Step 2 — Battery

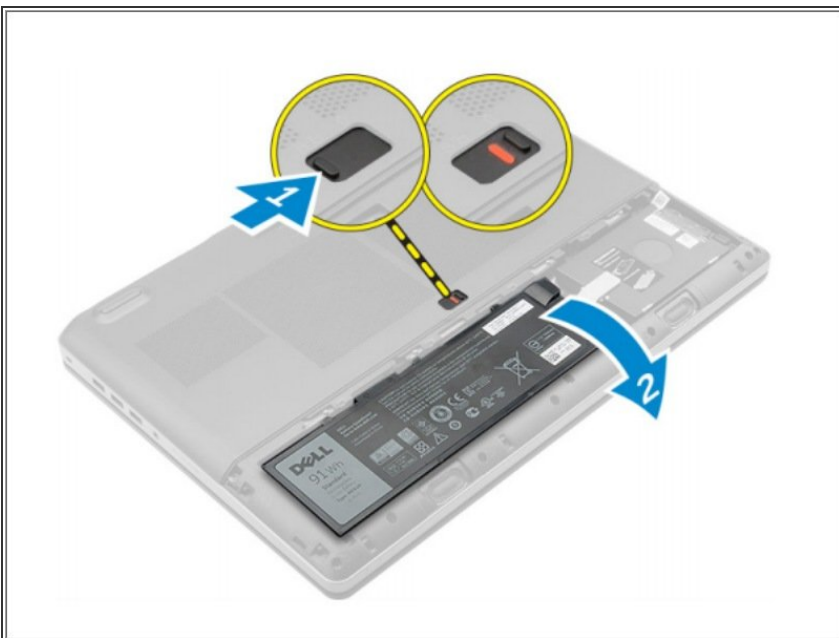



- Slide the release latch to unlock the battery [1].
- Lift and remove the battery from the computer [2].

Step 3 — Base Cover

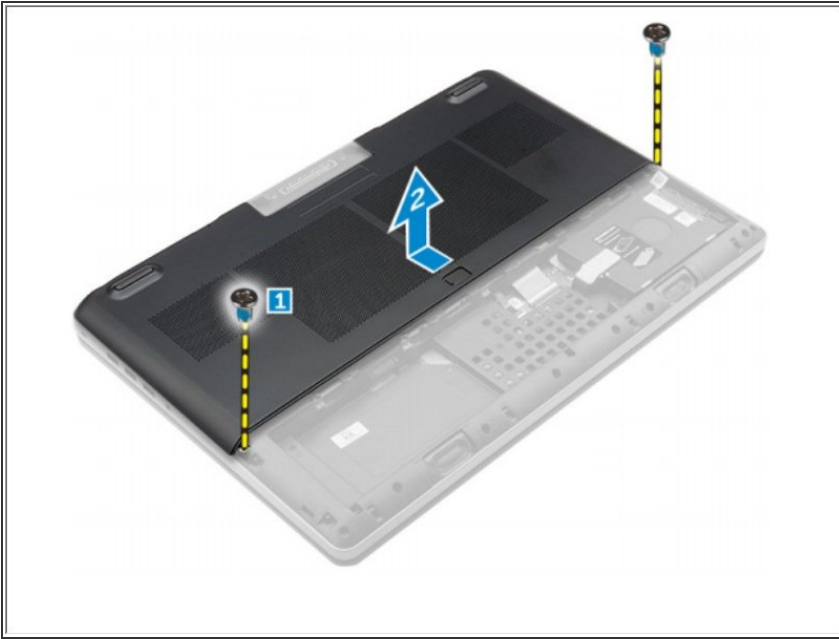

- Remove the screws that secure the base cover to the computer [1].
- Slide and lift the base cover away from the computer [2].

Step 4 — KeyBoard

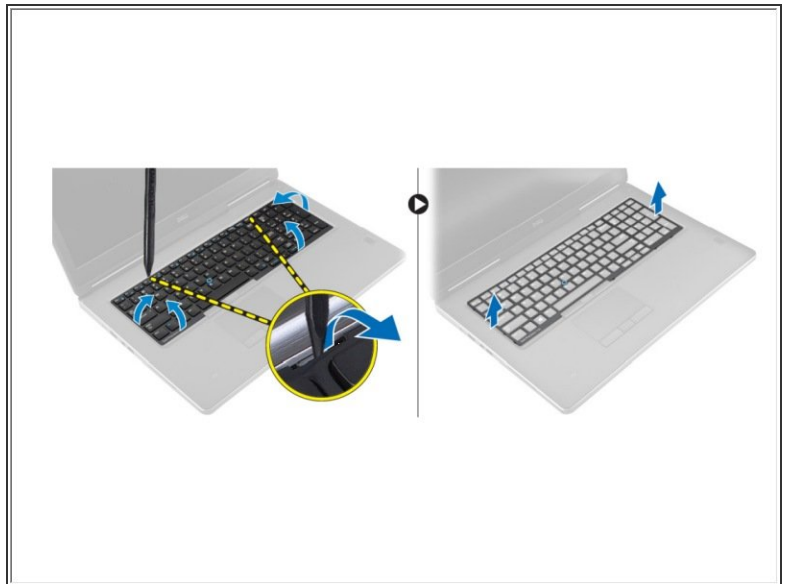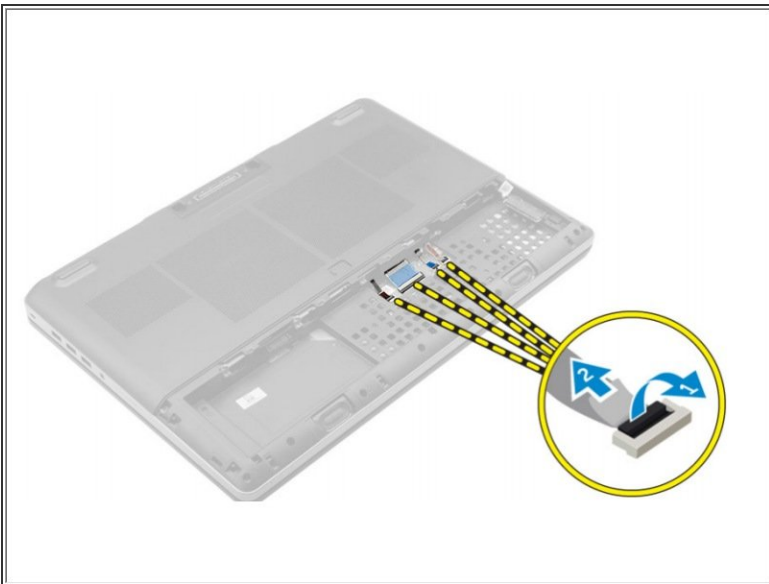


- Lift the tab and disconnect the 4 cables, one of the cables may be obstructed by the HDD, so you will need to unscrew/detach the HDD tray first [1, 2].
- Pry the keyboard trim starting from the bottom and work along the top edge and remove it from the computer.

Step 5




- Remove the screws that secure the keyboard to the computer [1].
- Lift the front side and slide the keyboard to remove it away from the computer [2, 3].

Step 6 — Memory Module

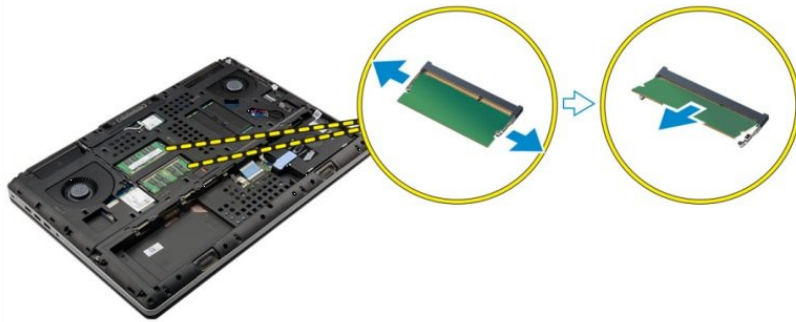

- Pry the retention clips away from the primary memory until it pops up.
- Lift the primary memory and remove it from the computer.

Step 7

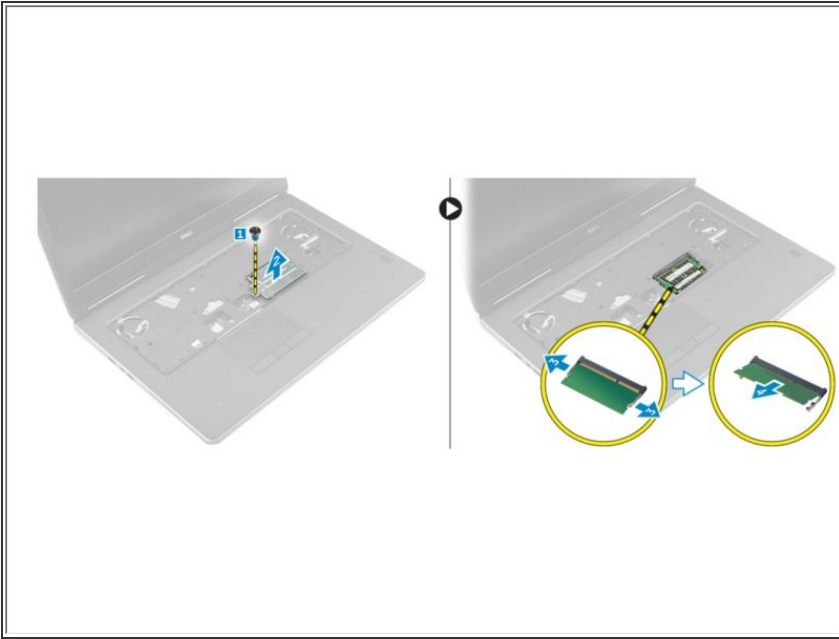

- Remove the screw that secures the memory shield to the computer [1].
- Lift and remove the memory shield from the computer [2].
- Pry the retention clips away from the memory module until it pops up [3].
- Lift the memory module and remove it from the computer [4].

To reassemble your device, follow these instructions in reverse order.