



# HP Beats Special Edition 15-p390nr Motherboard Replacement

This is a prerequisite guide to disassembling the motherboard.

Written By: Michelle



---

## INTRODUCTION

If you find yourself needing to replace the motherboard for your HP Beats Special Edition 15-p390nr, this guide will help you do so.

---

### TOOLS:

- [Phillips #0 Screwdriver](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
  - [Metal Spudger](#) (1)
-

## Step 1 — Keyboard



 Turn computer off before starting.


- Turn computer over and begin removing noticeable 8mm screws with a Phillips #0 screwdriver.

## Step 2



- ⓘ Some screws may be hidden under a screw cover.
- Simply use a metal spudger to pop off the screw cover to unveil the hidden 8mm screw.
- ⓘ Screw cover may fly when removing.

## Step 3

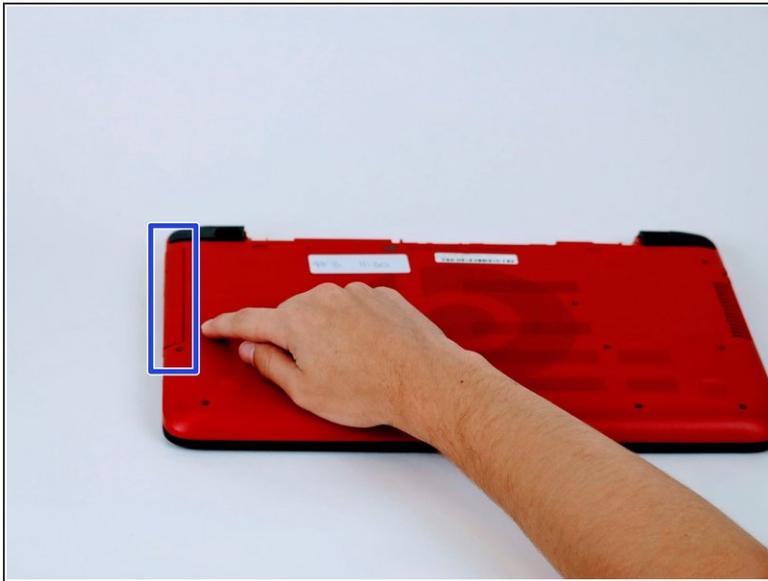

- Once screws are removed you may now remove the optical drive.
- Remove the hidden 3mm screw in the optical drive port.

## Step 4



- Remove the rubberized feet located on the left and right shoulder of the computer to uncover hidden 8mm screws.
- ⓘ Popping noises are normal.
- The shoulder caps are removable. Underneath there are 2 additional screws.

## Step 5



- Flip computer over and wedge metal spudger along the computer to pop off keyboard panel

## Step 6



- Unclip wires connected to the motherboard and remove keyboard from the device.


**i** 17 screws should be removed up to this point.

## Step 7 — Motherboard




- Remove screws from the motherboard.
- ⓘ 11 screws should be removed from the motherboard

## Step 8

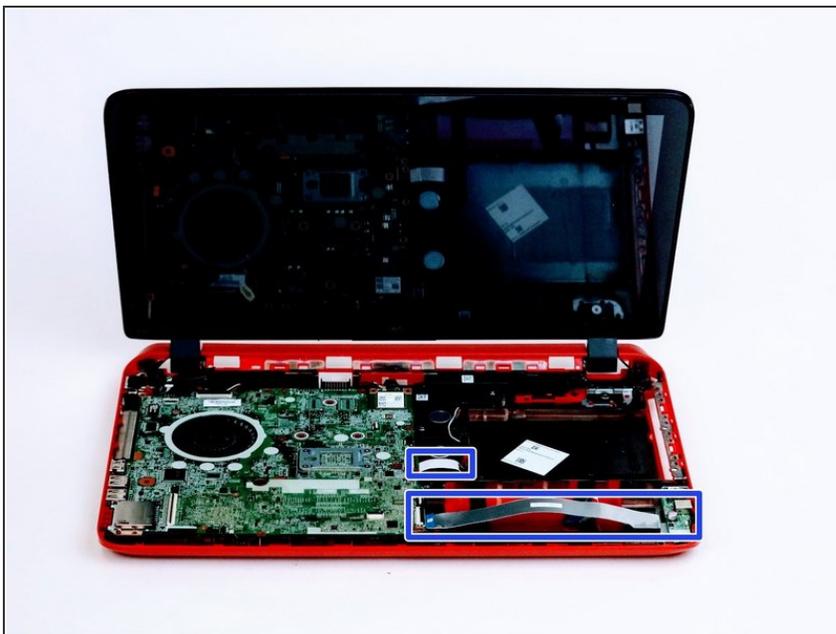


- Unclamp wire strips from motherboard.

## Step 9

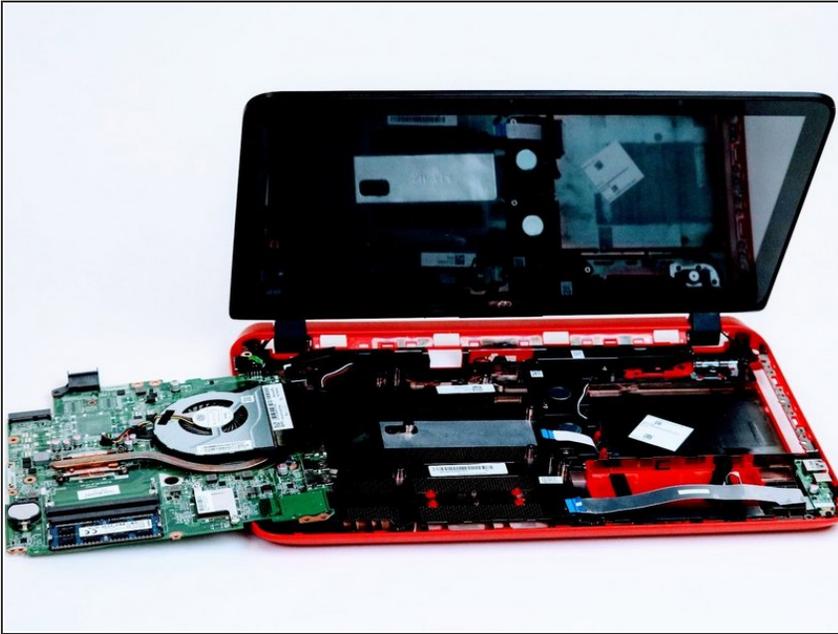

- Detach by lifting the motherboard up and flip the motherboard over.

## Step 10

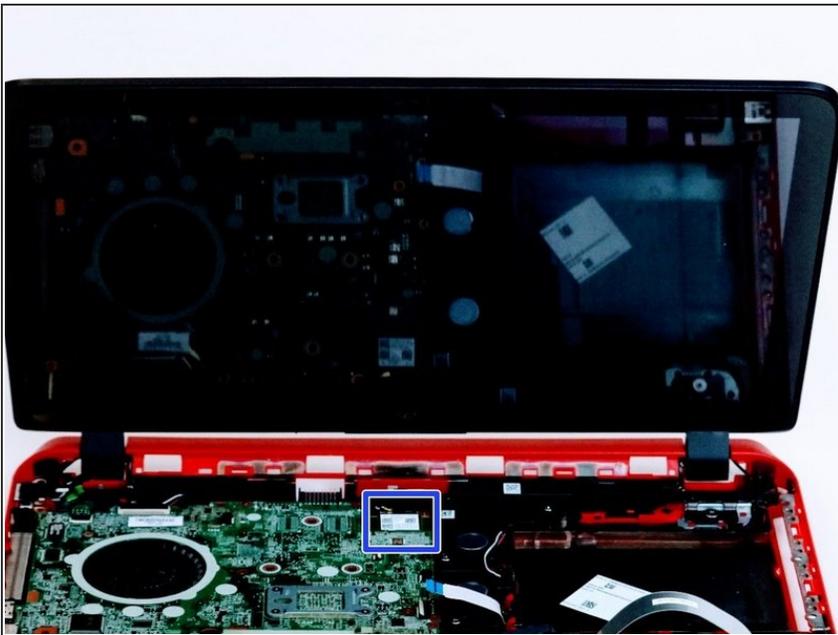

- Unclip wifi card for further procedures

To reassemble your device, follow these instructions in reverse order.