




# Acer Aspire S7-392-6484 LCD Replacement

If an unresponsive screen is an issue, replace the LCD to restore functionality to your computer.

Written By: Nicholas Wise

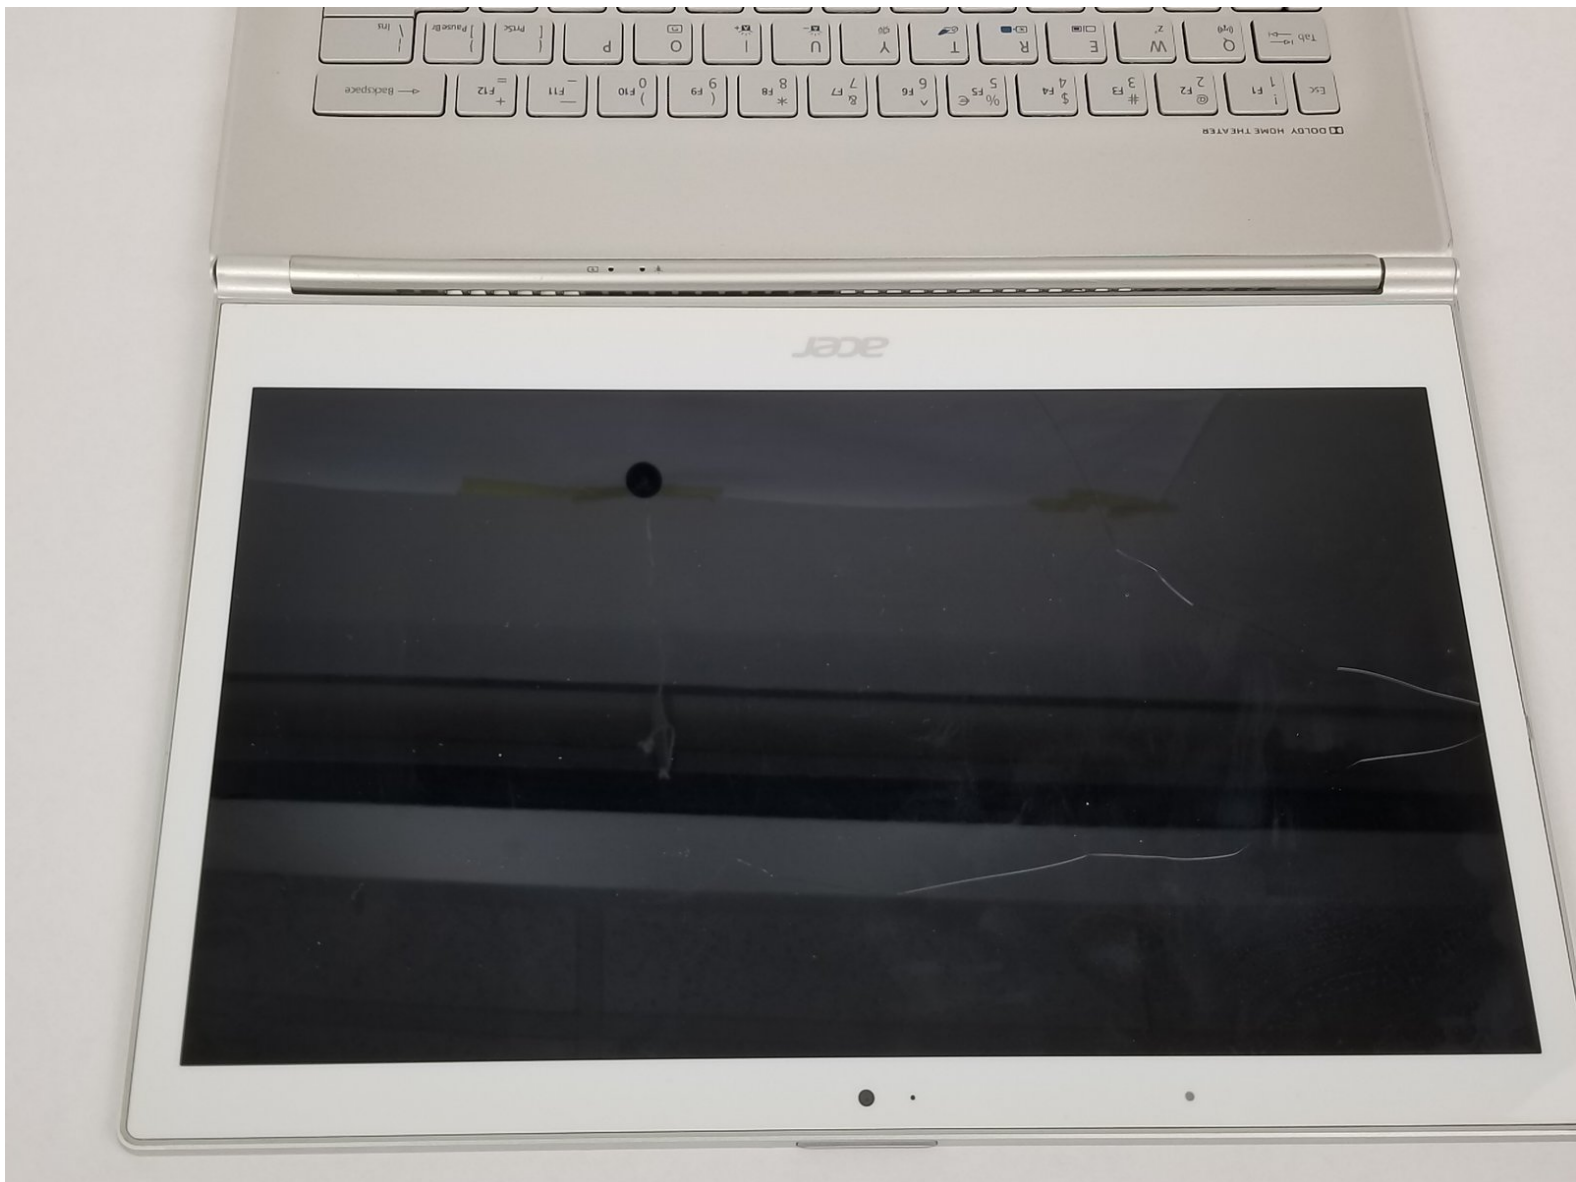

---

## INTRODUCTION

In this guide you will learn how to replace the LCD of the Acer Aspire. The screen and LCD are glued together on this device, so should a screen replacement be necessary a LCD replacement will be the required repair. To determine if an LCD replacement is required, please refer to the troubleshooting page for this device.

---


### TOOLS:

- [Jimmy](#) (1)
  - [Heat Gun](#) (1)
-

## Step 1 — LCD



- Use a heat gun to heat the edges of the screen, loosening the adhesive underneath.
- Run a jimmy or similarly thin object around the edge of the screen.
- Using a suction cup, lift up on the screen to separate it from the adhesive.

 Be aware that the screen will most likely crack significantly during these steps. Be prepared to immediately replace the LCD should you undertake this repair.

## Step 2



- Turn over the display to show the connectors underneath.
- Disconnect the marked connectors to remove the display from the casing.

To reassemble your device, follow these instructions in reverse order.