



HP 15-BA078DX Touchscreen Replacement

This guide will detail the process of replacing the Touchscreen from the HP 15-BA078DX laptop.

Written By: Matthew Moore



INTRODUCTION

This guide will detail the process of replacing the Touchscreen from the HP 15-BA078DX laptop.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery



- Unclip the two latches on the bottom of the laptop.
- Slide the battery straight out while holding the clip open.

Step 2 — Touchscreen

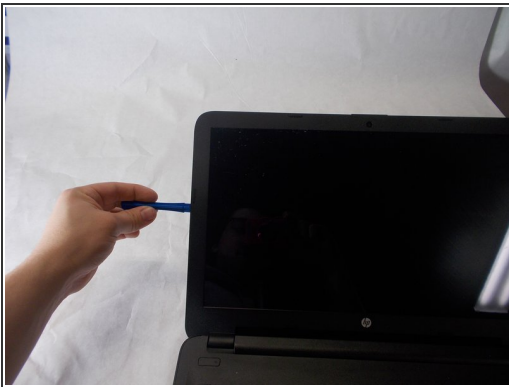

- Carefully use the blue plastic opening tool to remove the outer frame of the screen.

Step 3




- Flip the laptop on its back.
- Detach the bottom section of the screen frame from the laptop by using the black nylon spudger.

Step 4




- Separate the frame from the screen.

Step 5

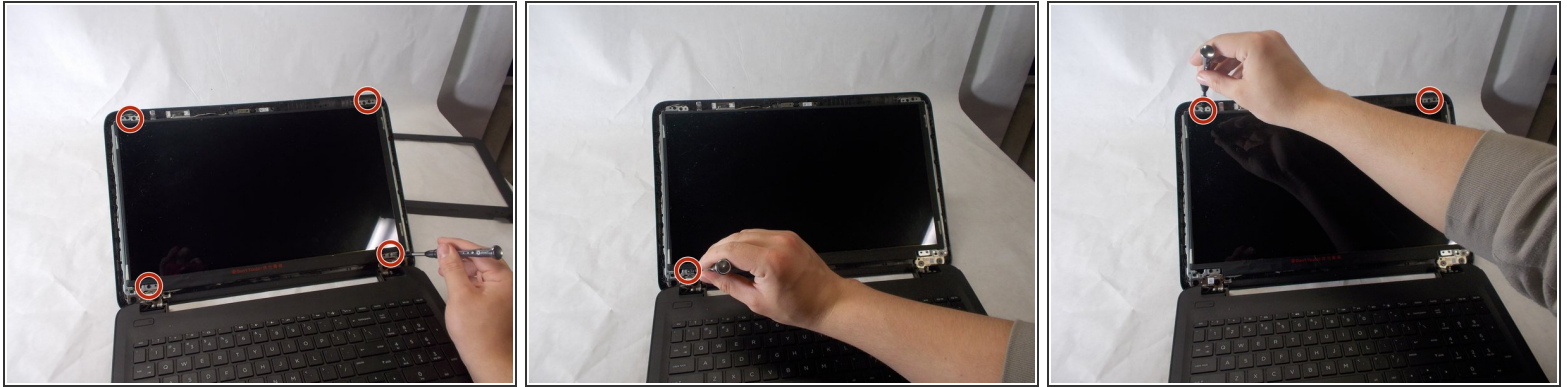

- Using the Phillips #0 screwdriver, unscrew the 4 screws around the frame.

Step 6

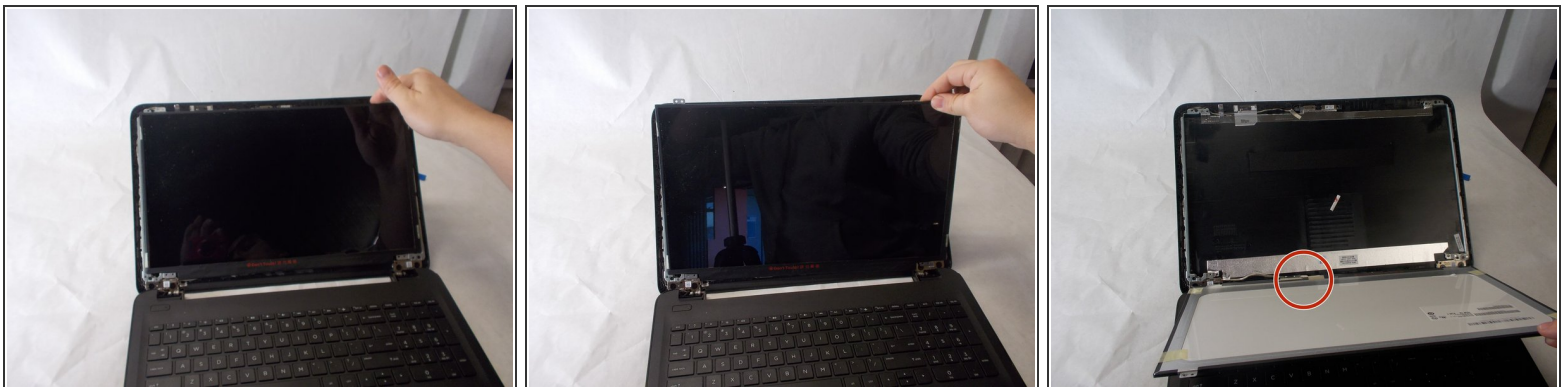

- Remove the touchscreen from the laptop.

⚠ Be careful not to damage the screen connector located at the bottom of the screen.

To reassemble your device, follow these instructions in reverse order.