



Hp 15-f305dx Screen Replacement

This guide will instruct you on how to replace your Hp 15-f305dx screen.

Written By: Brandon





TOOLS:

- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery



⚠ Turn off the computer. If you are unsure whether the computer is off or in Hibernation, turn the computer on, and then shut it down through the operating system.

Step 2



- Turn the computer upside down on a flat surface.

Step 3





- Firmly slide the release latch to unlock the battery and slide the battery release latch to release the battery.

Step 4




- Lift the battery from the middle and then pivot it outward to remove it from the computer.

Step 5 — Screen

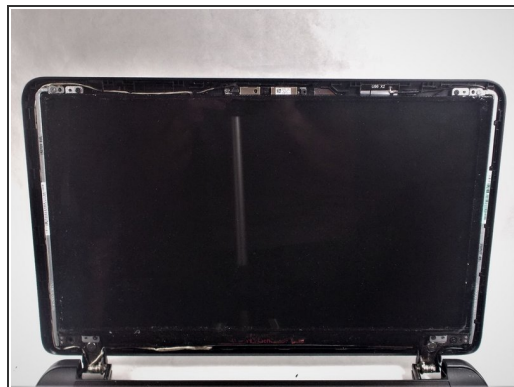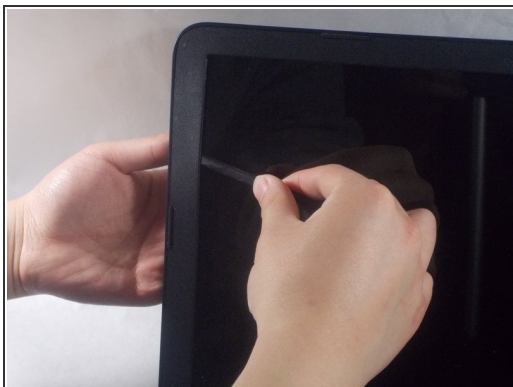


- Remove the bezel by prying it away from the screen using the spudger.
- Note: Some models may have two screws hidden behind round covers in the lower section of the bezel.

Step 6

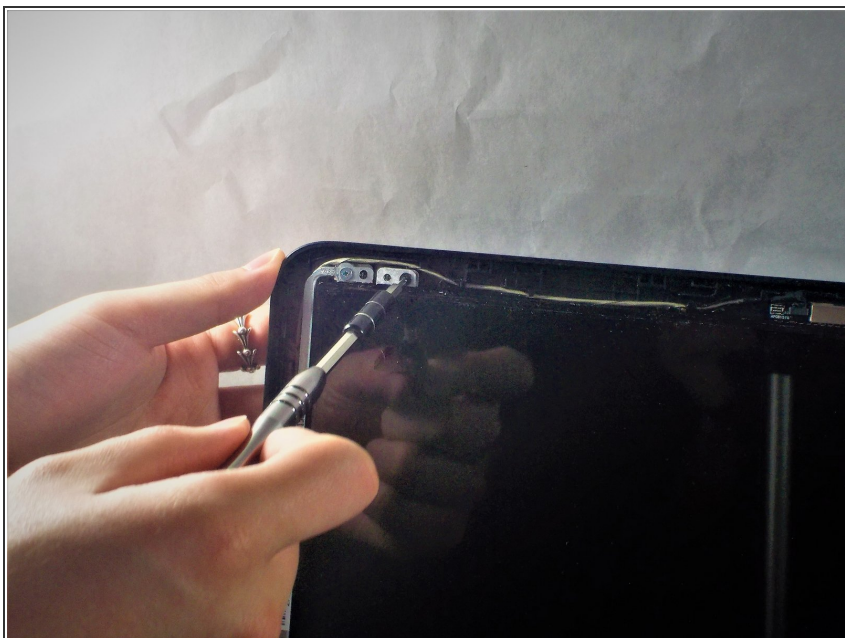



- Remove the four 3mm PH1 Phillips head screws in each corner of the screen and do not care about outer screws.

Step 7

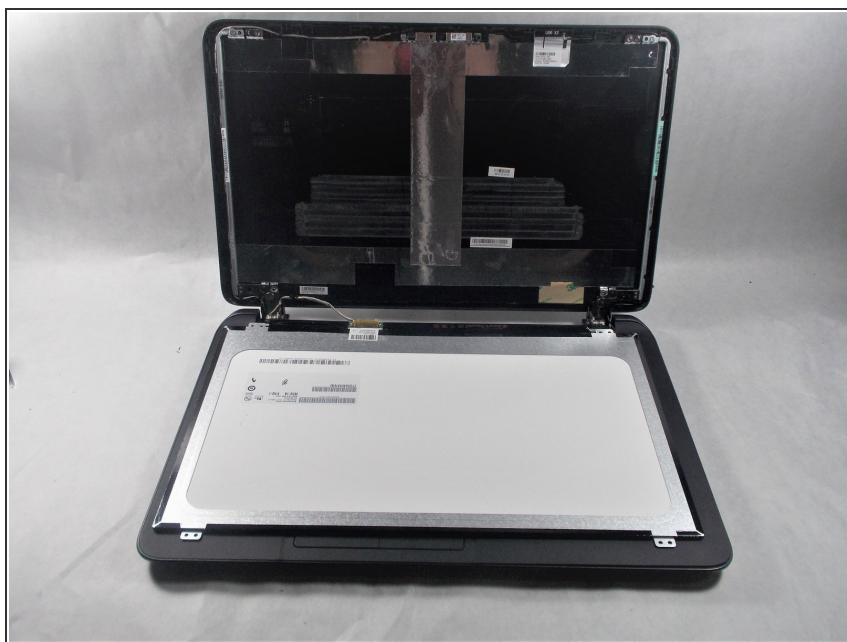

- Remove the screen and place the screen very softly on the keyboard.

Step 8

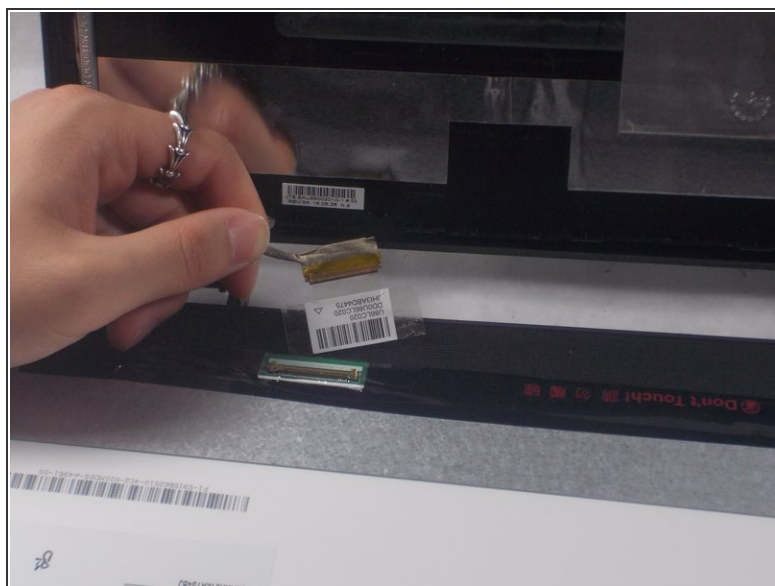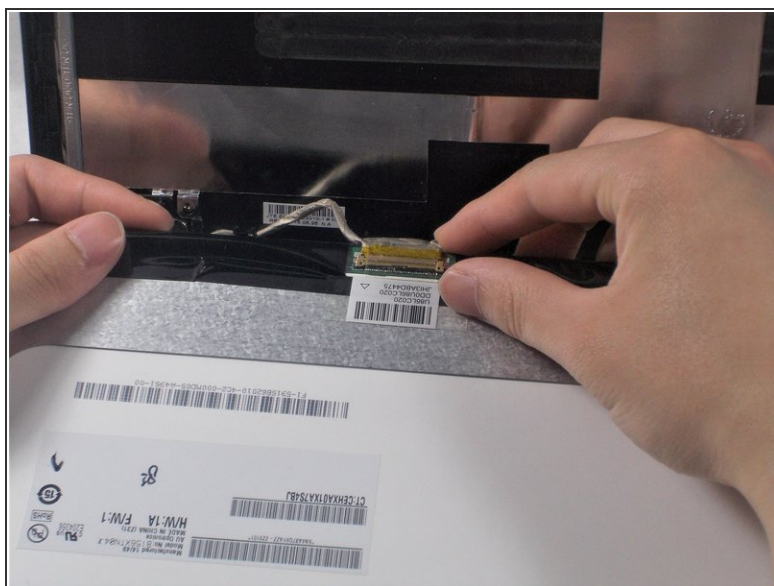

- Remove the sticker gently and disconnect the metal blade.

To reassemble your device, follow these instructions in reverse order.