



# Sceptre X9 Komodo VII Speakers Replacement

Written By: Xenia Leon Rodriguez






## TOOLS:

- [Phillips #2 Screwdriver](#) (1)
-

## Step 1 — Stand

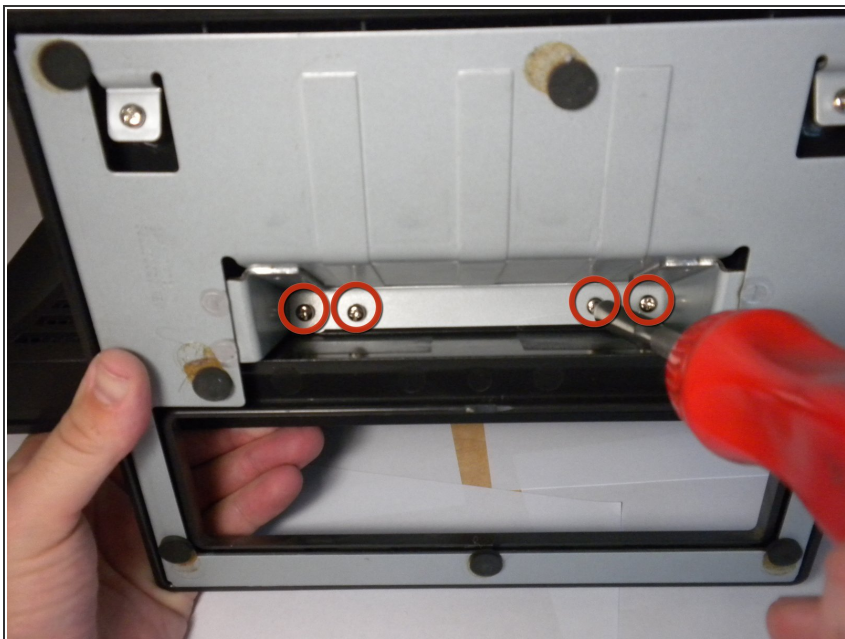

- Place the monitor face down.
- Remove the four 11.5mm screws with a #2 Phillips screwdriver.
- Remove the stand by pulling it out.

## Step 2





- Remove two 11.5mm screws with a #2 Phillips screwdriver.
- Remove the plastic bar.

## Step 3 — Board Cover



- Using a #2 Phillips screwdriver, remove the six 7mm screws at the circled locations.



## Step 4

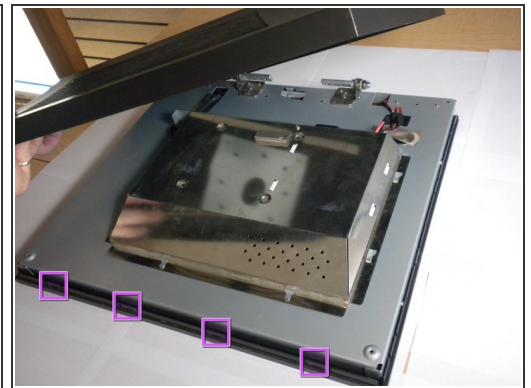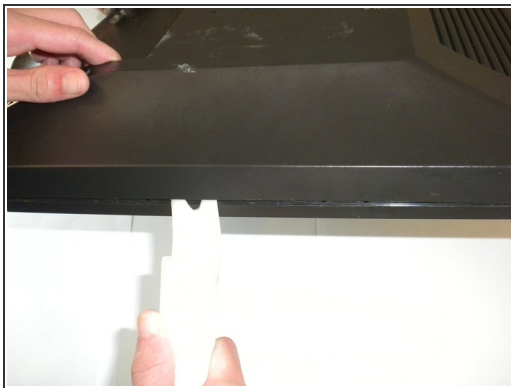

- Pry the monitor using the plastic opening tool to release the clips holding the cover on.
  - ❗ There are four clips on each side, four on the top, and one on the bottom.
  - ❗ You may hear a loud snapping noise when releasing the clips. Do not be alarmed, it is natural.
- Once all the clips have been released, remove the cover by pulling it up.



## Step 5

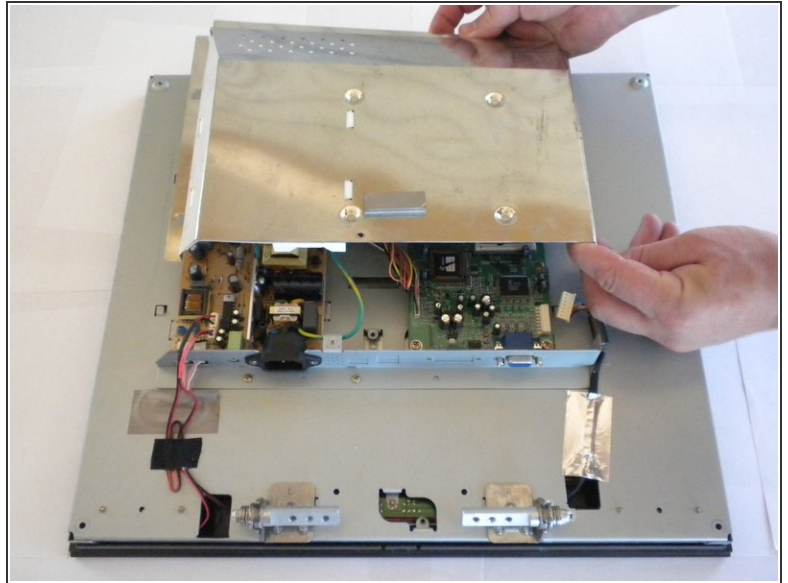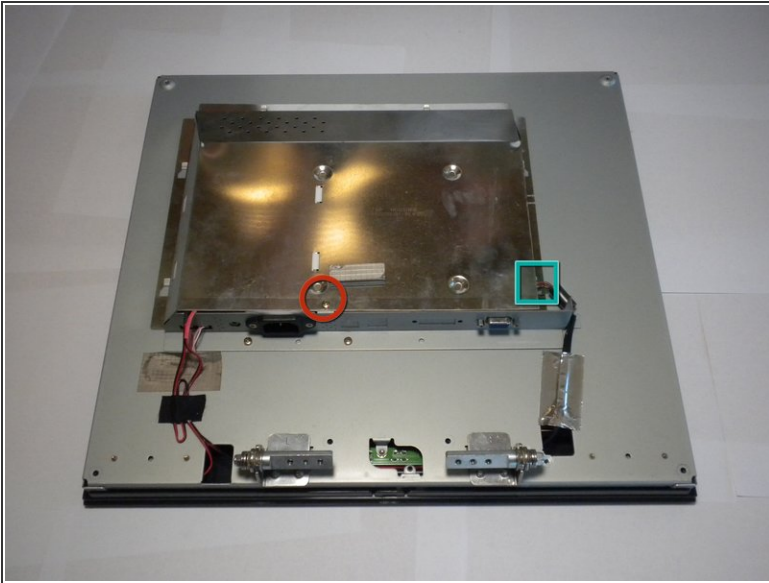

- Using the #2 Phillips screwdriver, remove the one 6mm screw.
- Unplug the indicated cable by pulling on the base.
- Slide the cover toward the top of the monitor.
- Remove the cover.

## Step 6 — Speakers



- Disconnect the two connectors to the speakers by gently pulling on the hard plastic straight up.

## Step 7



- Carefully peel the tape from the board.

## Step 8



- Flip the monitor so the screen is facing you.
- Using Phillips #2 screwdriver remove the four 6.25 mm screws securing the speakers:

## Step 9



- Carefully lift the speakers up.

To reassemble your device, follow these instructions in reverse order.