



# Google Home Mini Disassembly

Disassembly of Google Home Mini.

Written By: Mia Sulaiman



---

## INTRODUCTION

A guide to disassemble Google Home Mini for further repairs.

---

### TOOLS:


- [Tweezers](#) (1)
  - [T6 Torx Screwdriver](#) (1)
-

## Step 1 — Google Home Mini Disassembly



- Place device on a flat surface.

## Step 2

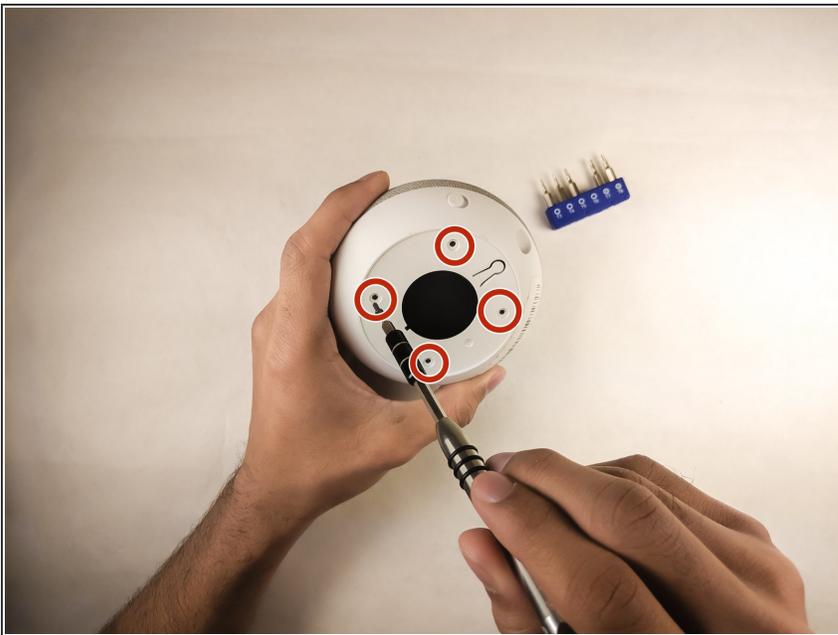

- Remove the rubber bottom as per the [Google Home Mini teardown guide](#).
- Remove the four 7mm T6 Torx screws from the bottom.

### Step 3



- Remove the lower half of the device.
- ⚠ Be careful as a black ribbon cable connects the two halves together.

### Step 4



- Using a pair of tweezers, unlatch the Zero Insertion Force (ZIF) fastener that connects the ribbon cable to the board.
- ⓘ Flip up and push the ZIF fastener towards outside of the lower case to loosen it.

## Step 5



- Pull the ribbon cable off.

To reassemble your device, follow these instructions in reverse order.