



Raleigh M20 Handlebars Replacement

This guide will show you how to replace a broken pair of handlebars.

Written By: Jon Ribera





TOOLS:

- [3/8" Allen Wrench](#) (1)



PARTS:

- [New handlebars](#) (1)

Step 1 — Handlebars




- i Strip all the accessories from your old handlebars. (reflectors, mirrors, etc...)
- Using a 3/8" Allen wrench, loosen the nuts that hold the brake controls and gear shifters.

Step 2



- Place an Allen wrench (size doesn't matter) under the bike grip.
- Twist the grip back and forth while pulling on the Allen wrench to remove the grip.

Step 3

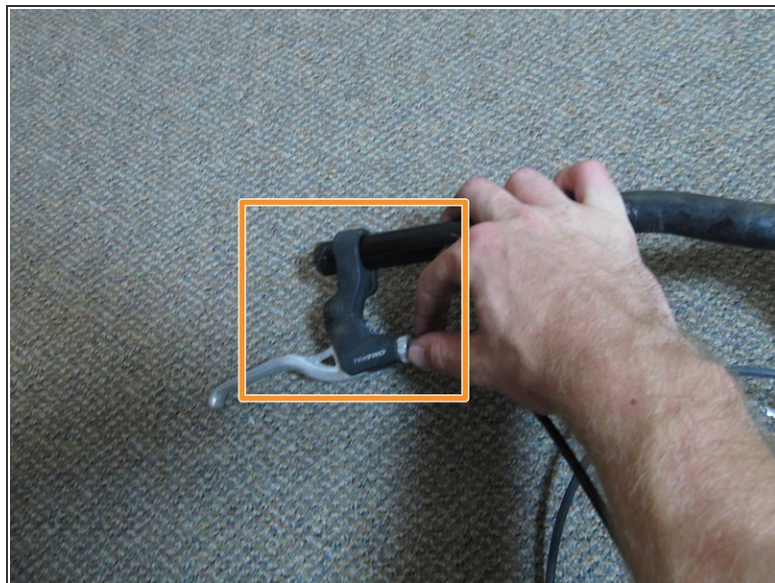

- Slide off the gear shifters.
- Slide off the brake controls.

Step 4



- Loosen the central nut on the faceplate that connects the bars to the steering column. If the bars are secured by a faceplate with a detachable top, loosen the nuts on the faceplate and remove.
- Lift the handlebars from the bike frame.
- ⓘ Move the bars until they're in the correct position for your stance. Tighten the faceplate nuts with a 3/8" Allen wrench to firmly secure the handlebars in place.
- ⓘ Sit on the bike and make final adjustments to the positioning of the brakes and gears.

To reinstall the handlebars, complete these steps in reverse order. If there is a problem with the alignment, return to the handlebar repair guide and repeat step 4.