



# Dell XPS 15 9530 Battery Replacement

Removal of the battery will be covered in this...

Written By: Larissa Omura



## INTRODUCTION

Removal of the battery will be covered in this guide. Be careful disconnecting cables as to not break them or their connectors.

**For your safety, discharge your battery below 25% before disassembling your device.** This reduces the risk of a dangerous thermal event if the battery is accidentally damaged during the repair. If your battery is swollen, [take appropriate precautions](#).

---

### TOOLS:

T5 Torx Screwdriver (1)

Spudger (1)

Phillips #0 Screwdriver (1)


---

## Step 1 — Base Cover



- Using a T5 Torx screwdriver, remove ten 3mm screws.

## Step 2

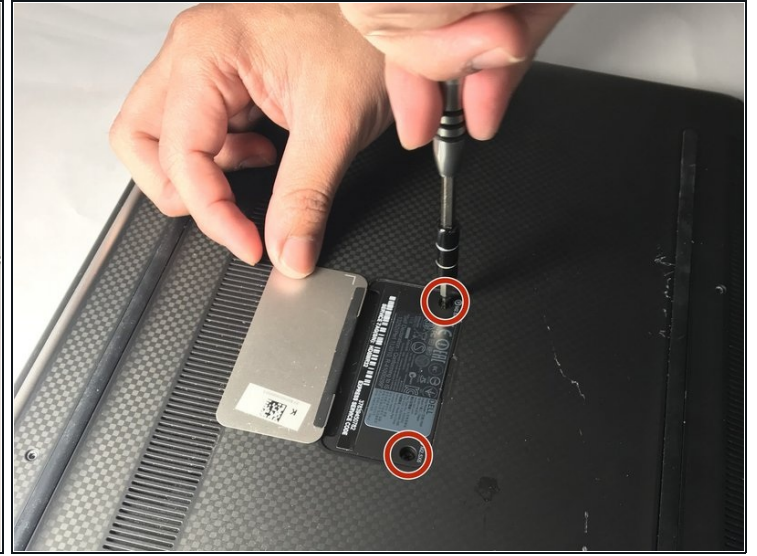

- Lift the plastic tab.
- Remove two 3mm Phillips #0 screws under the plastic tab.


## Step 3



- Lift the lower case off.




## Step 4 — Battery

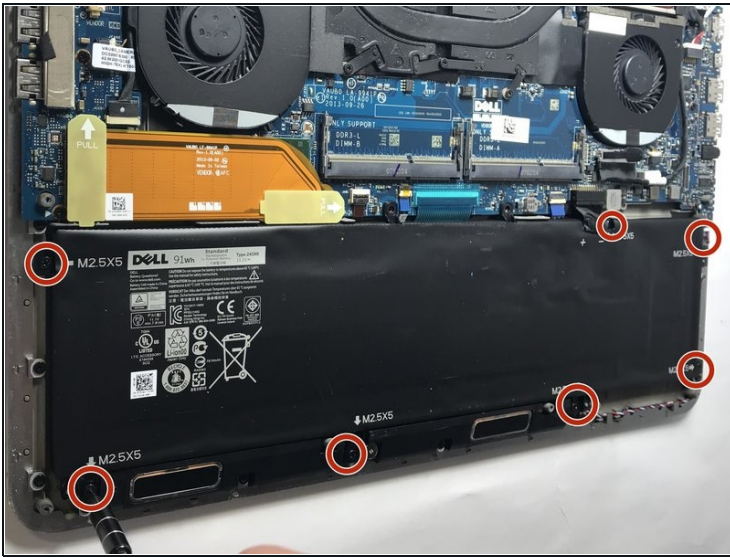

- Using a Phillips #0 screwdriver, remove the seven 3.5mm screws that secure the battery to the palm rest assembly.

## Step 5

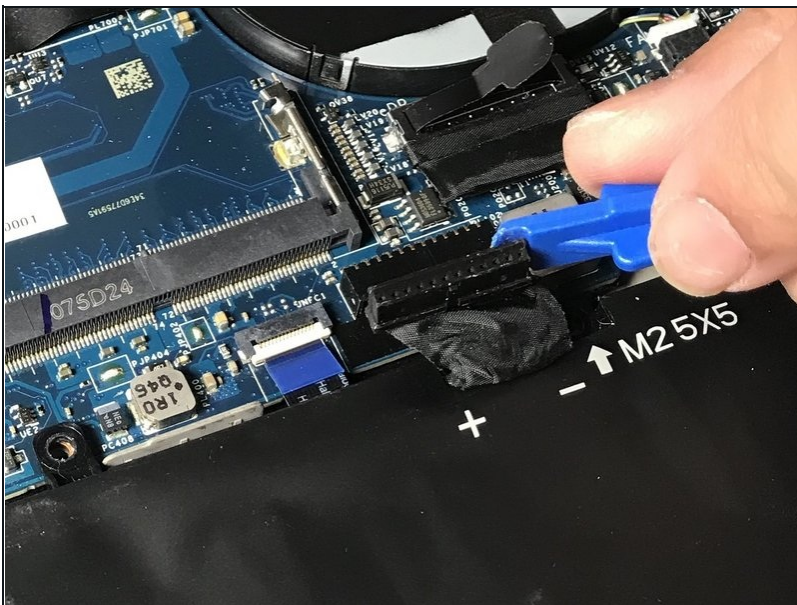

- Disconnect the battery cable from the system board.

⚠ Be sure to use a plastic tool, not a metal one.

## Step 6



- Lift the battery off the chassis.

---

To reassemble your device, follow these instructions in reverse order.

Take your e-waste to an [R2 or e-Stewards certified recycler](#).

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers community](#) for help.