



ZTE Lever Front Camera Replacement

This guide will show you how to replace the front camera in a ZTE Lever phone.

Written By: Eric Lilling



INTRODUCTION

This guide will demonstrate how to replace the front camera from the mother board of the ZTE Lever phone.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [IFixit Pro Tech Toolkit](#) (1)
-

Step 1 — Battery



- Remove the SD card and the Sim card from the device.
- ⓘ The Sim and SD cards are not shown here as our device did not come with them.

Step 2

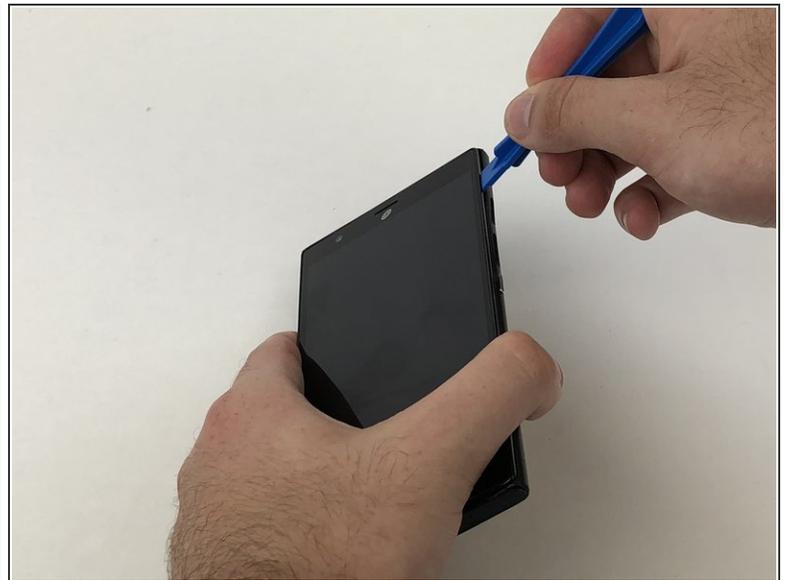

- Use an iFixit opening tool to separate the back from the device.

Step 3



- Remove the two 1.6mm Phillips #0 screws from the battery plug cover.
- Remove the cover.

Step 4




- Disconnect the battery cable from the motherboard with a plastic opening tool.

Step 5




- Use your hands, or a plastic opening tool, to pry the battery from the phone.

Step 6 — Front Camera

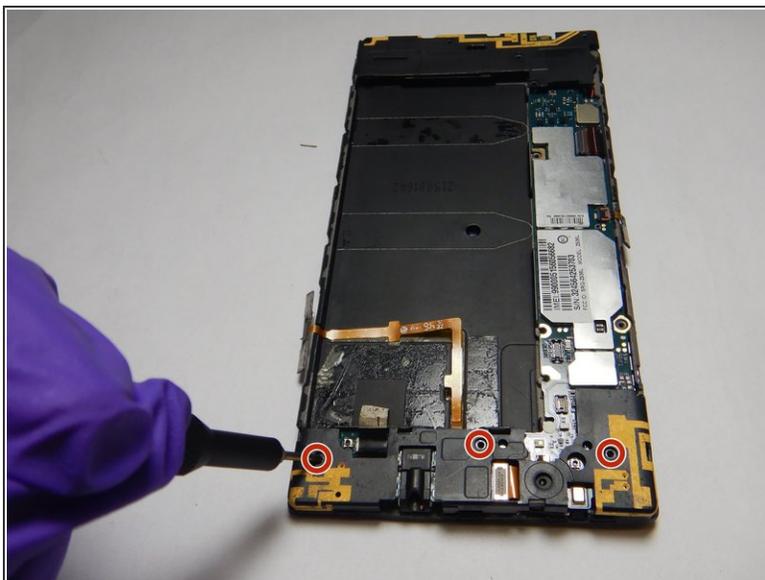

- Unscrew the three 1.6mm Phillips #0 screws on the plastic cover that are near the top edge of the phone by the camera.
- Pry off the plastic cover using the iFixit opening tool.

Step 7

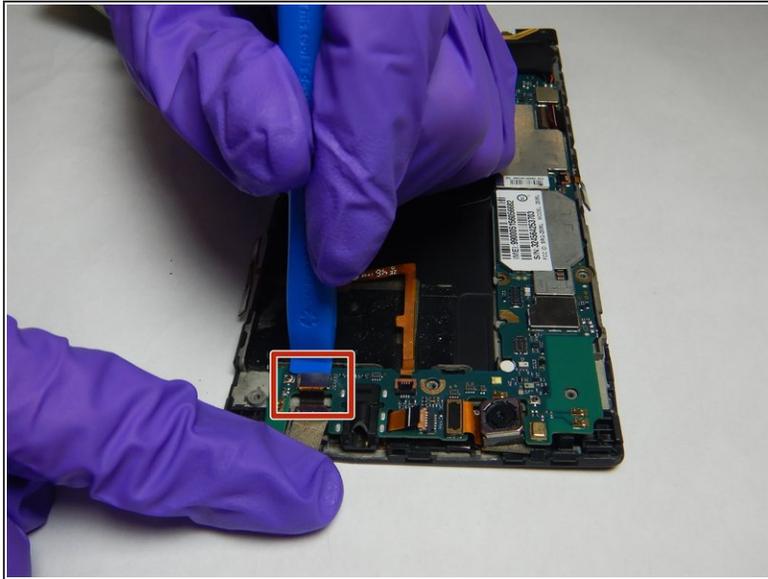

- Unplug the front-facing camera press fit connector cable using the iFixit opening tool.
- Remove the camera from the motherboard.

To reassemble your device, follow these instructions in reverse order.