




Blackberry 7105t Speaker Replacement

Written By: CeeJay

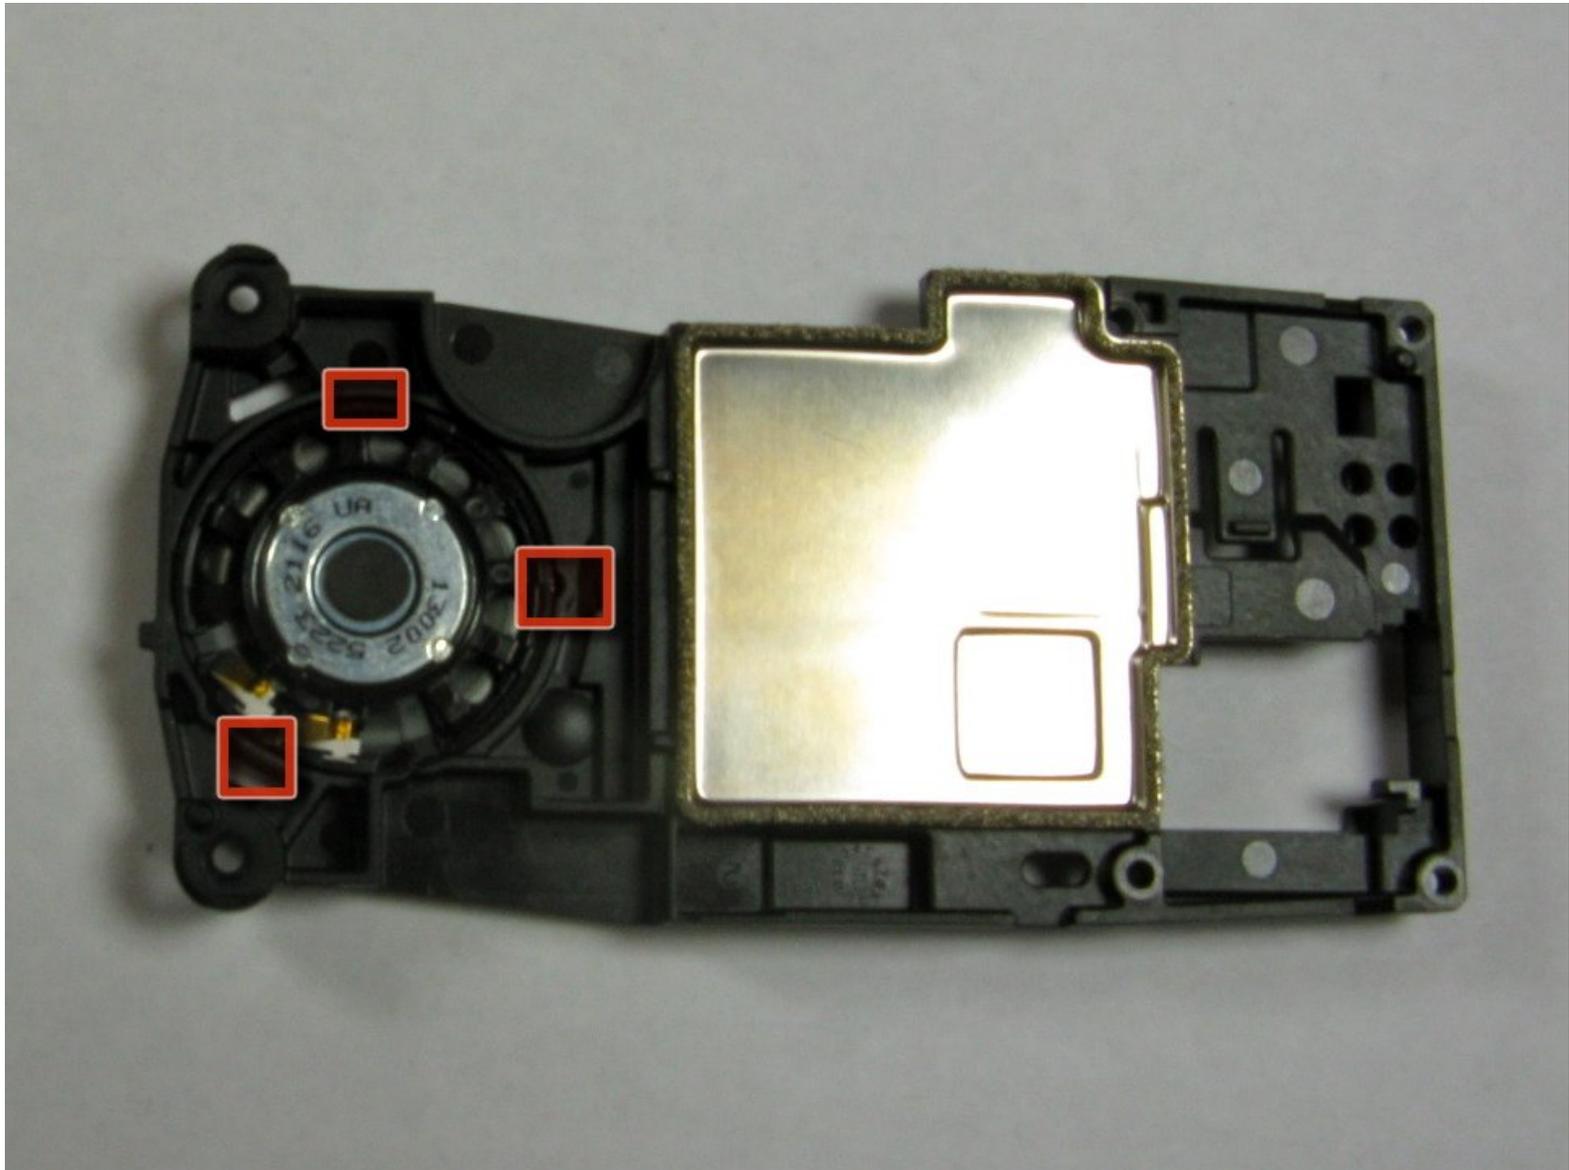

INTRODUCTION

This guide will allow the user to replace the speaker.

TOOLS:

- [Spudger](#) (1)
-

Step 1 — BlackBerry 7105t Disassembly




- With the back of the device facing you, press down on the button while sliding the battery casing away from the speaker to remove it.

Step 2



- Use a plastic opening tool or fingernails to unclip the two hinges of the speaker covering and remove it.

Step 3

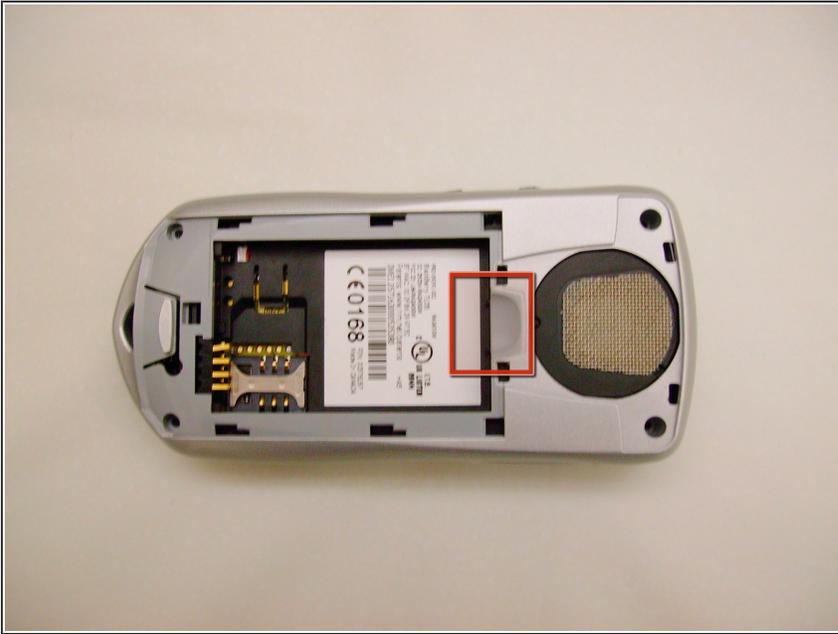


- Remove the battery by pushing against it from the right and then pulling towards you.

Step 4



- Remove the four screws indicated in the picture with a #T6 Torx Bit screwdriver and set them aside.

Step 5

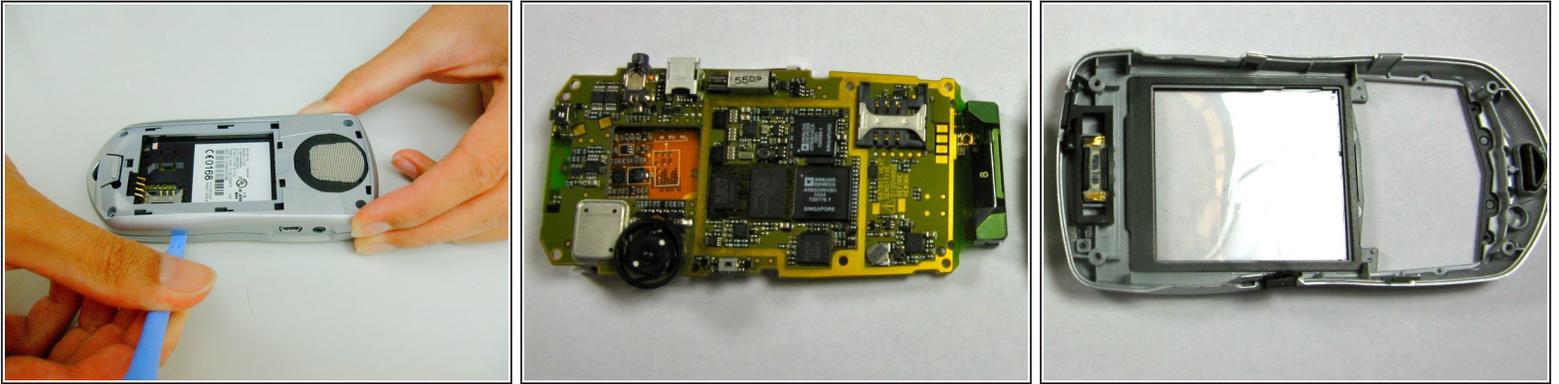


- Use a plastic opening tool or your fingernails to remove the plastic backing.
- Start with the seam indicated in the picture and slide the plastic opening tool until the case is separated.

Step 6





- Unscrew the four screws indicated in the picture with #T6 Torx Bit screwdriver.
- Place the four screws released from the phone in a plastic bag.

Step 7

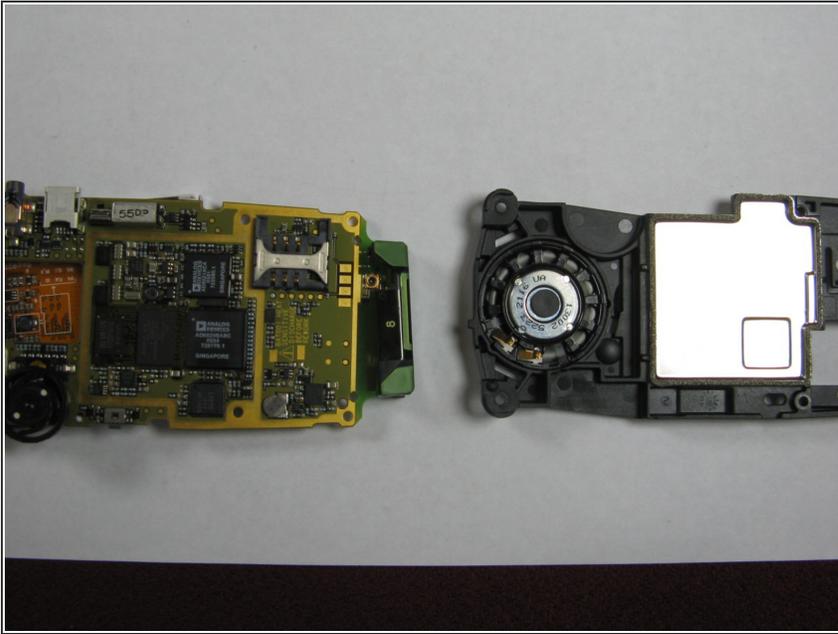

- The black battery casing and logic board can now be separated for the following steps.

Step 8 — Speaker

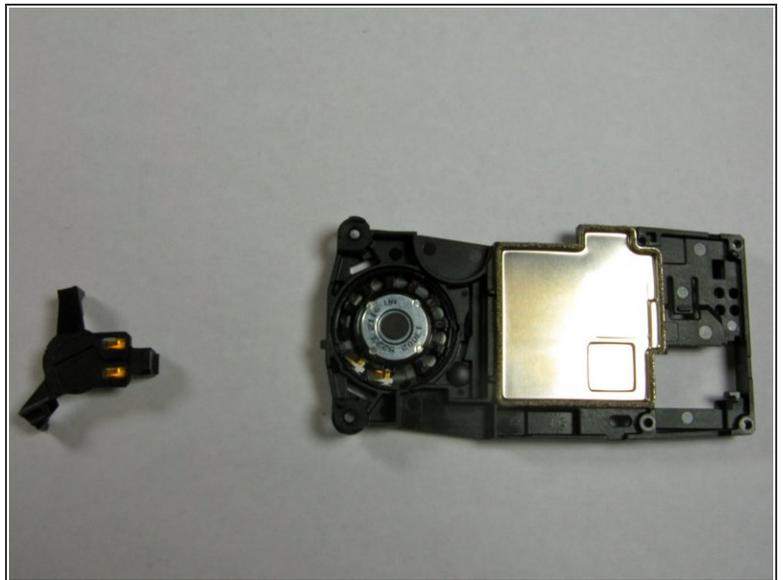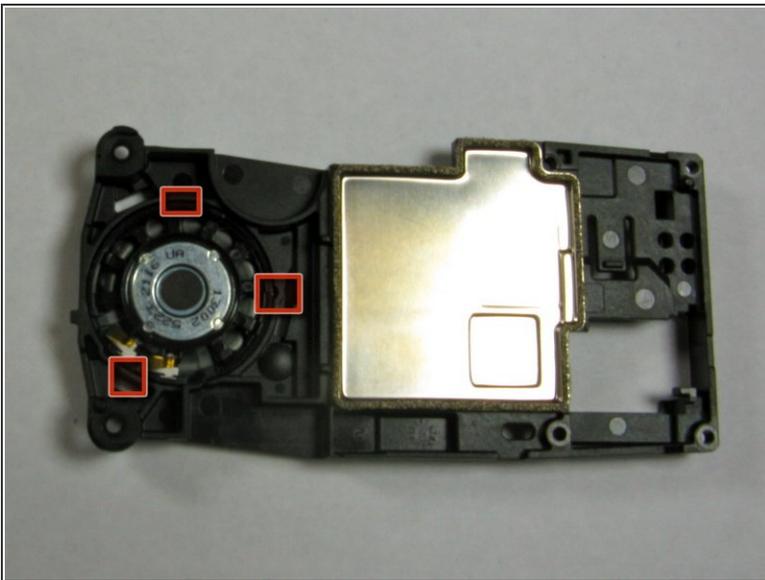

- With the speaker facing towards you, use a spudger to unfasten the three clips indicated in the picture.
- Place the three clips in plastic bag and set aside.
- Once clips are removed, you will have full access to remove the speaker.

This document was generated on 2022-07-11 10:19:51 PM (MST).

To reassemble your device, follow these instructions in reverse order.