



Blackberry 7105t Keyboard Replacement

Written By: CeeJay



INTRODUCTION

This guide outlines how to replace the keyboard.

TOOLS:

- [iFixit Opening Tools](#) (1)
-

Step 1 — BlackBerry 7105t Disassembly




- With the back of the device facing you, press down on the button while sliding the battery casing away from the speaker to remove it.

Step 2



- Use a plastic opening tool or fingernails to unclip the two hinges of the speaker covering and remove it.

Step 3

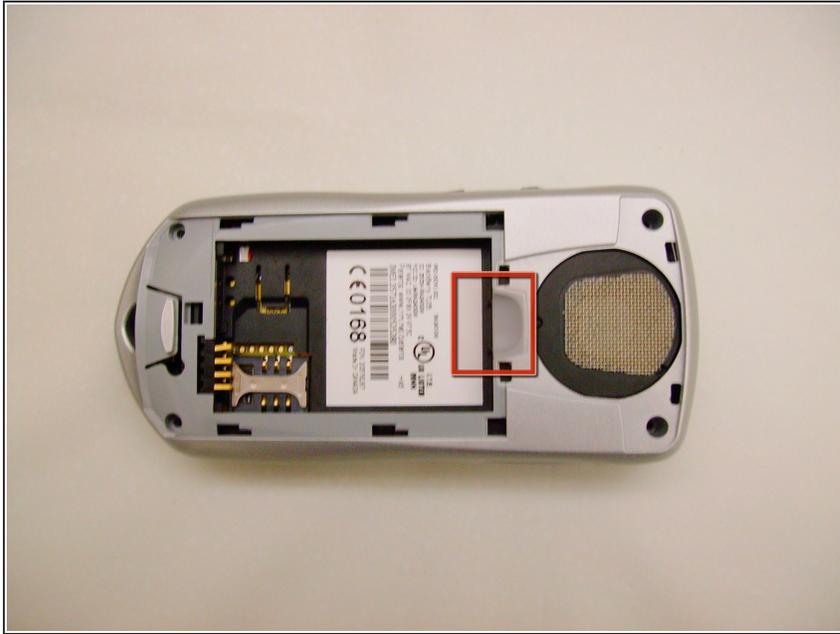


- Remove the battery by pushing against it from the right and then pulling towards you.

Step 4



- Remove the four screws indicated in the picture with a #T6 Torx Bit screwdriver and set them aside.

Step 5

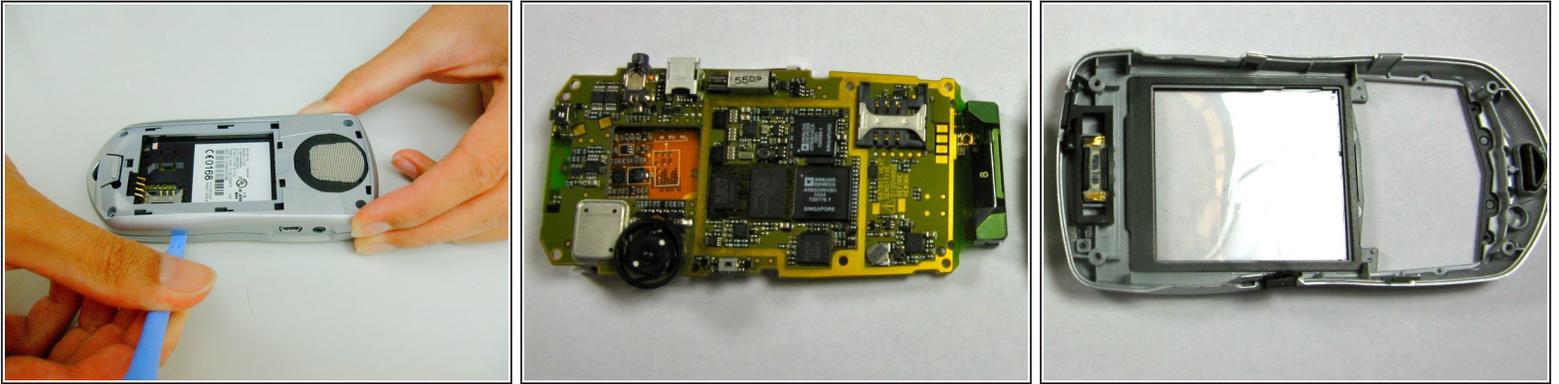


- Use a plastic opening tool or your fingernails to remove the plastic backing.
- Start with the seam indicated in the picture and slide the plastic opening tool until the case is separated.

Step 6




- Unscrew the four screws indicated in the picture with #T6 Torx Bit screwdriver.
- Place the four screws released from the phone in a plastic bag.

Step 7

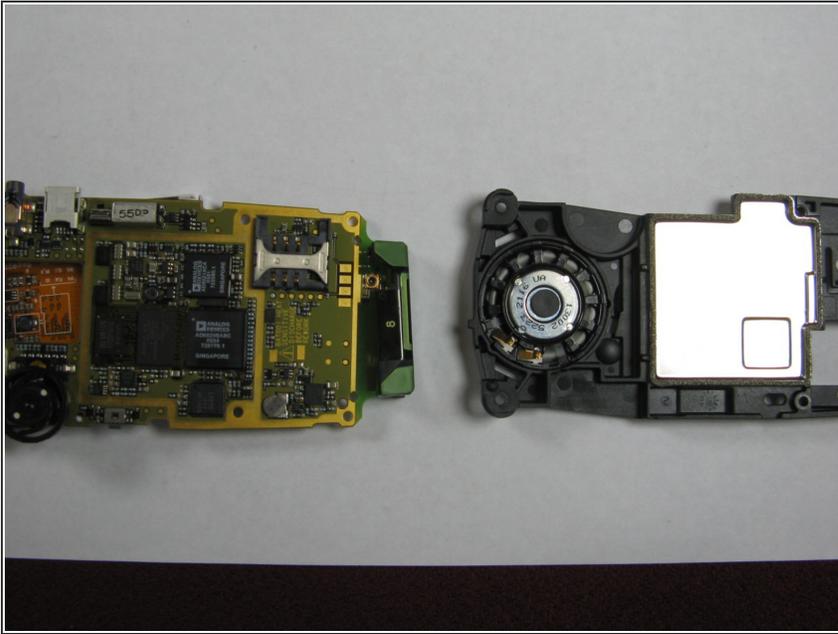


- The black battery casing and logic board can now be separated for the following steps.

Step 8 — Second Disassembly

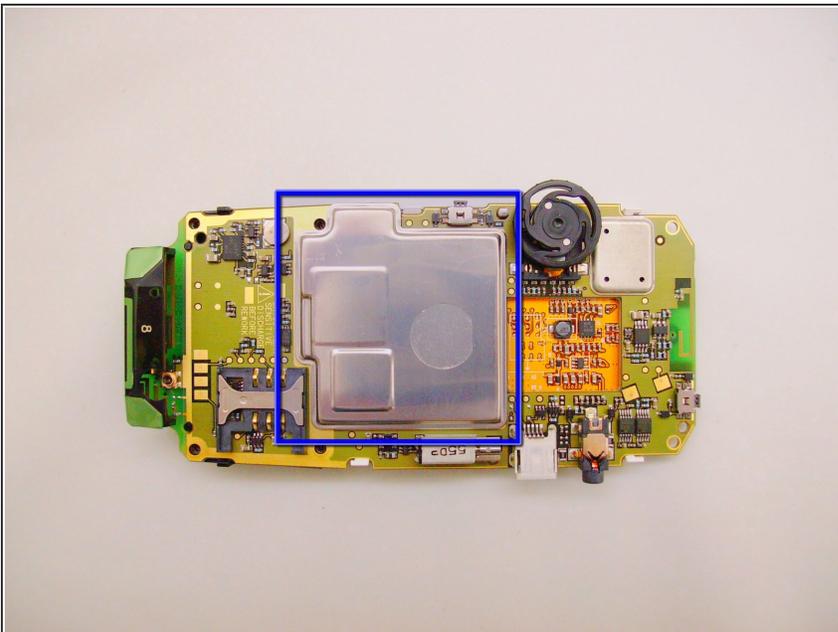

- The silver piece is not attached to the logic board in any way, and can be taken off by lifting it up with plastic opening tools.
- ⓘ **Warning:** Some of the phones have an adhesive between the silver part and the battery housing, so it could stick to the black piece you just removed.

Step 9 — Keyboard

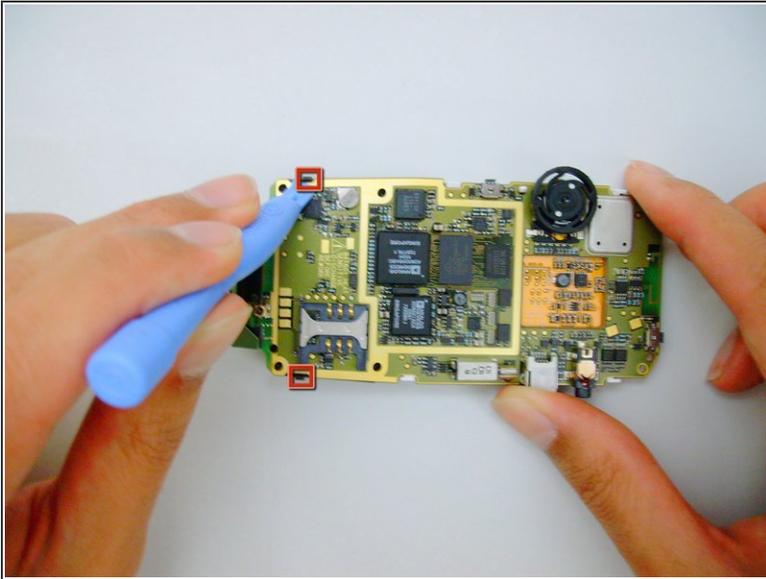

- Use a plastic opening tool to lift up the two black clips indicated in the picture.
- ⚠ Hold on to the keyboard while unfastening the clips.
- The keyboard will detach once the clips are unfastened.

To reassemble your device, follow these instructions in reverse order.