



BlackBerry 7510 LCD Screen Replacement

How to replace a BlackBerry 7510 LCD screen.

Written By: Neil Johnson



INTRODUCTION

This guide demonstrates how to remove and replace the LCD screen.



TOOLS:

- [T6 Torx Screwdriver](#) (1)
-

Step 1 — Back Face of Phone



- ❗ Remove the battery cover and battery before continuing.
- Remove the six T6 Torx screws on the back of the phone.
- Make sure to keep the screws somewhere that they will not get lost.

Step 2



- Using your finger nail or a spudger, carefully pry up the back cover.
- Begin in one spot and slowly circle around the device as you pry up all of the back cover.

Step 3




- Lift off the back cover.

Step 4



- Remove the two T6 screws.

Step 5

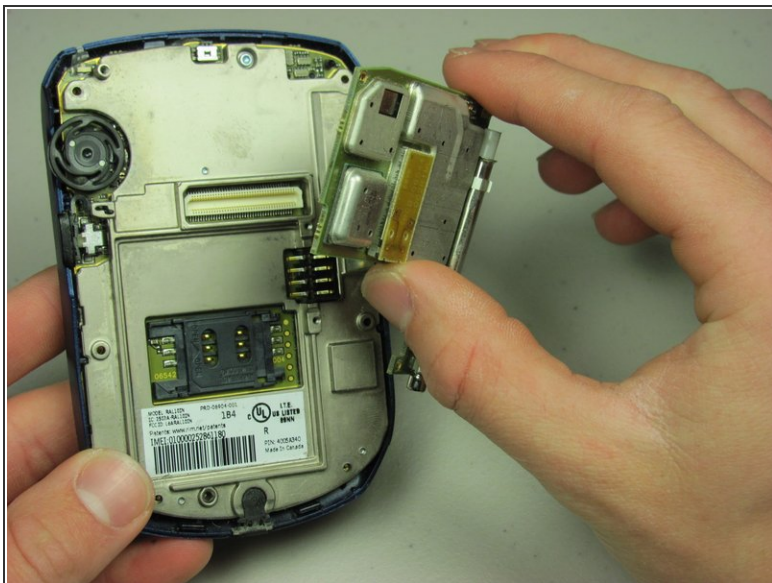



- Remove the daughterboard.
- Remove the exposed vibration motor.

Step 6 — LCD Screen




- Unscrew the screw holding the back plate.

Step 7

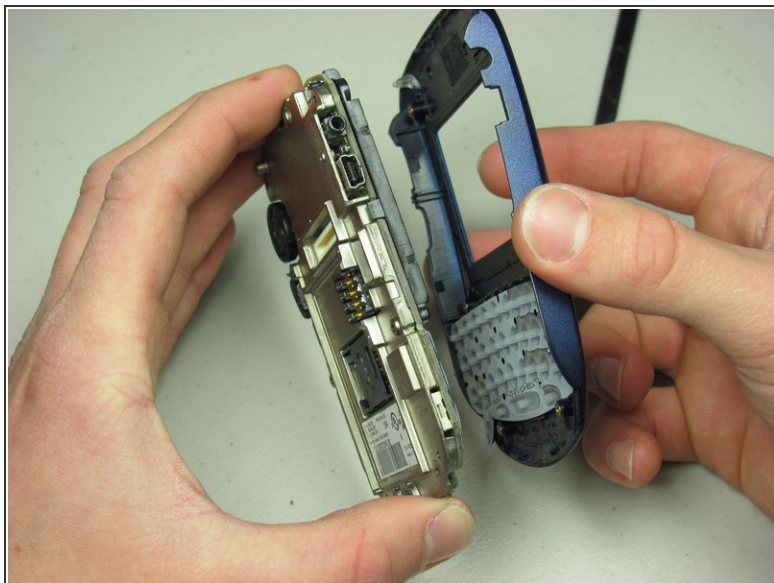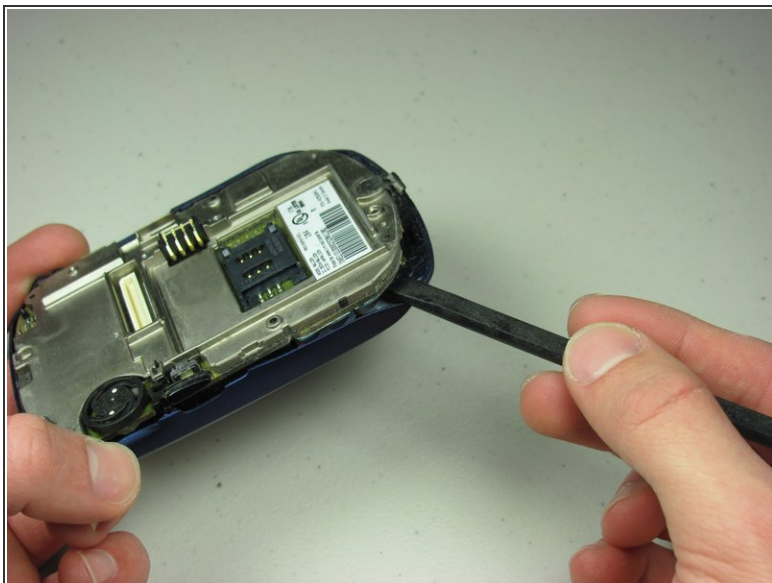


- Carefully pry off front cover. Make sure the plastic clips are unlatched before applying force.
- Lift off front cover from metal plate.

Step 8

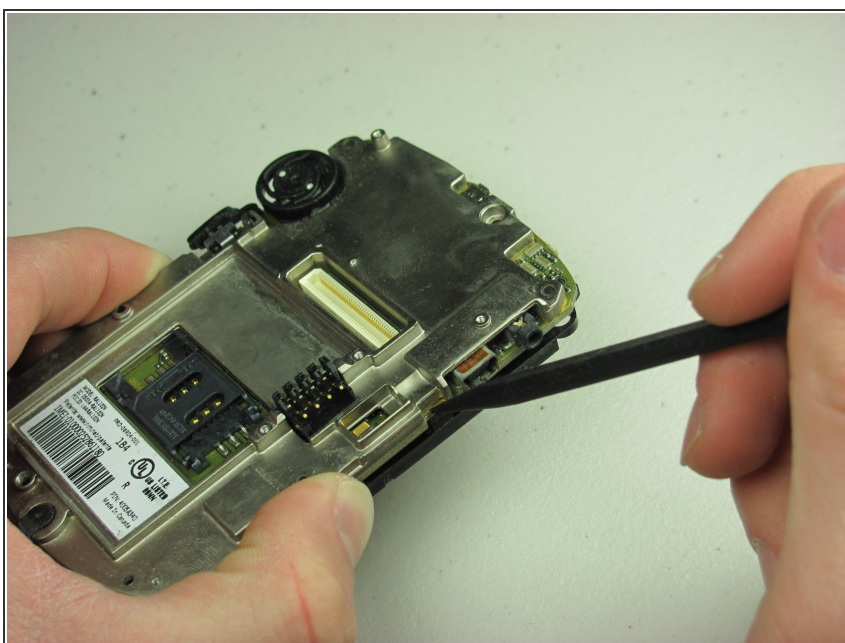

- Pry off the LCD screen with spudger at the two clips.

Step 9

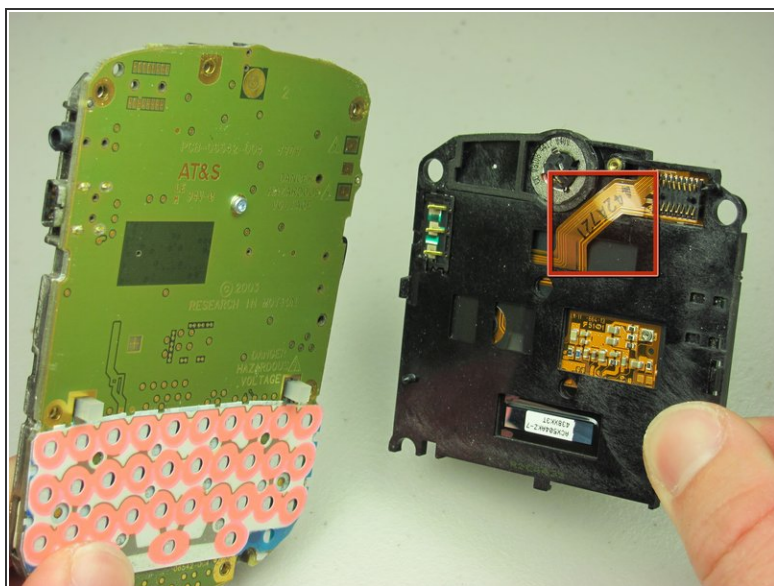

- Remove the LCD screen and replace it with a new one.

⚠ Careful not to rip the LCD ribbon.

To reassemble your device, follow these instructions in reverse order.