




Samsung Galaxy Note 10.1 Rear Facing Camera Replacement

This guide hopes to outline the process of replacing the back camera

Written By: Bryan Fernandez

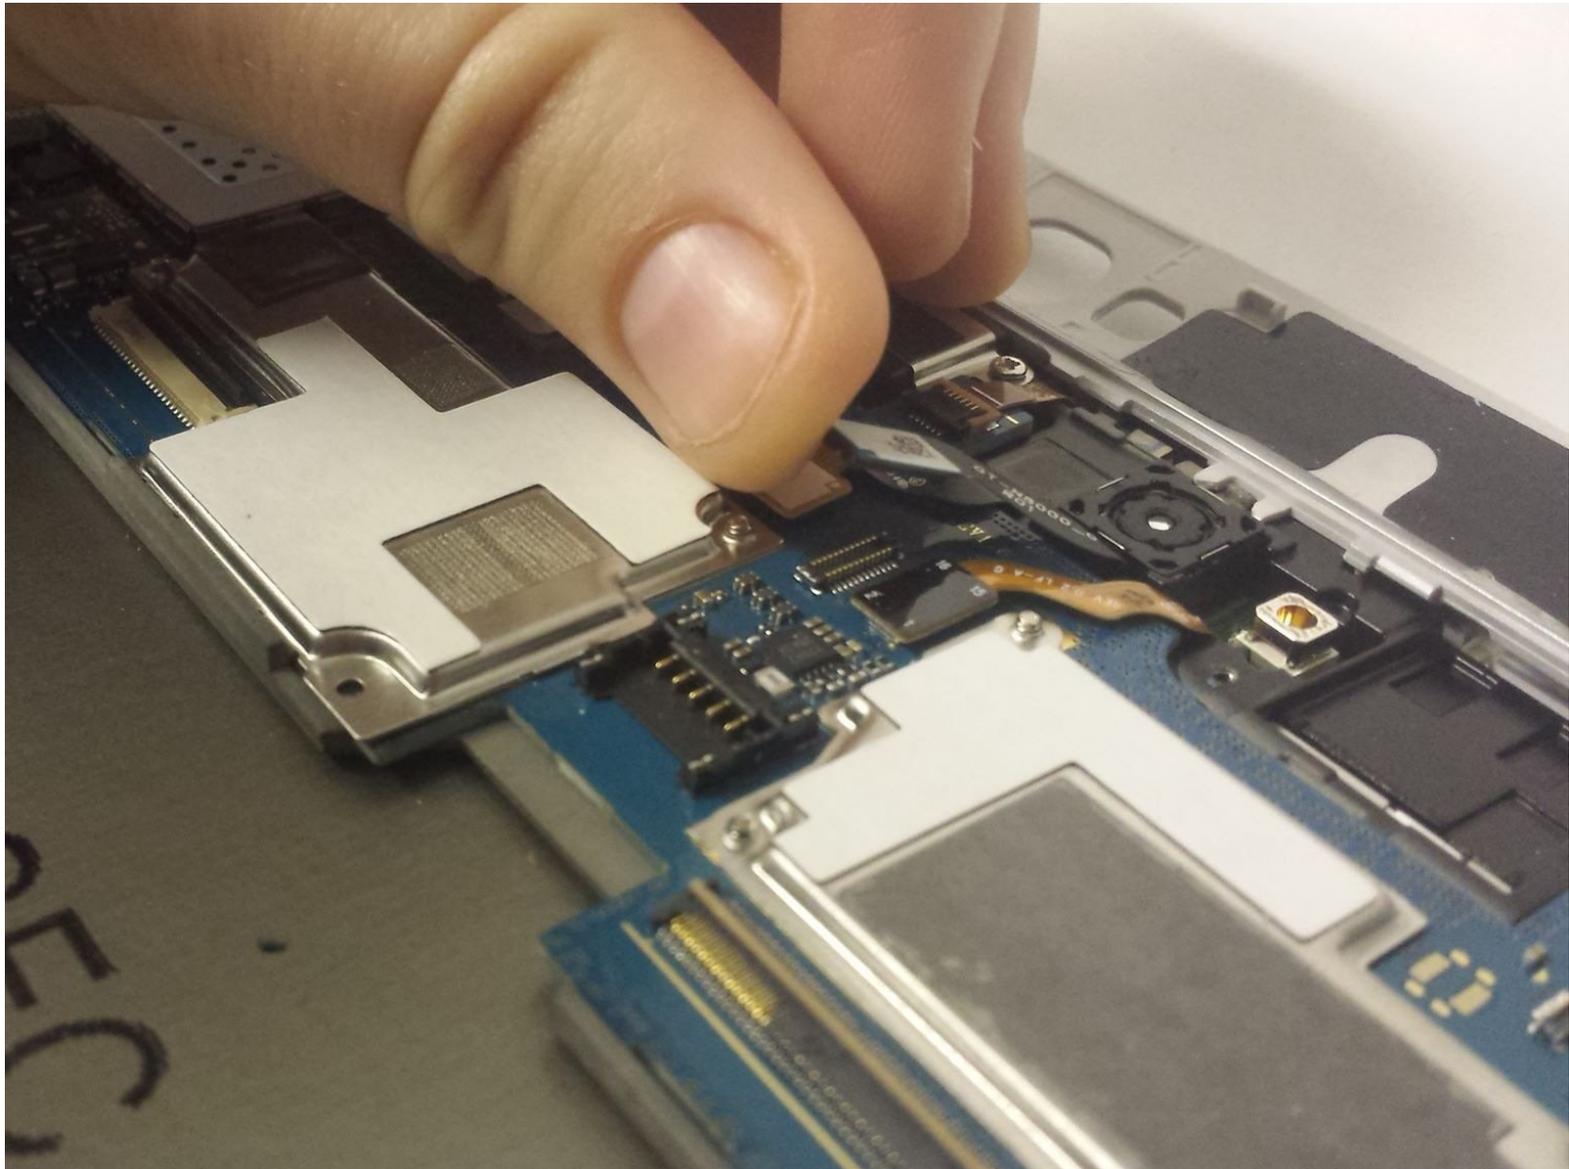

**TOOLS:**

- [Phillips #00 Screwdriver \(1\)](#)
- [iFixit Opening Tools \(1\)](#)

**PARTS:**

- [5 MP Back Camera for Samsung Galaxy Note 10.1 2012 \(1\)](#)

Step 1 — Removing the Top Piece



- This is the back of the device and where you will begin to take it apart
- It is necessary to remove the silver piece covering the camera first before removing the bigger back piece.
- Use the plastic opening tools to pry along the indicated box.
- Lift up the silver piece to reveal the rest of the back cover.


Step 2 — Removing the Back Cover



- Unscrew the three screws indicated by the red circles with the Philips #00 screwdriver.
- Using the plastic opening tools pry along the bottom of the device, moving to the sides of the cover to the top.
- Remove the back cover.

⚠ At this point use anti-static gloves or do **NOT** take it apart on carpet.

Step 3 — Removing the Camera

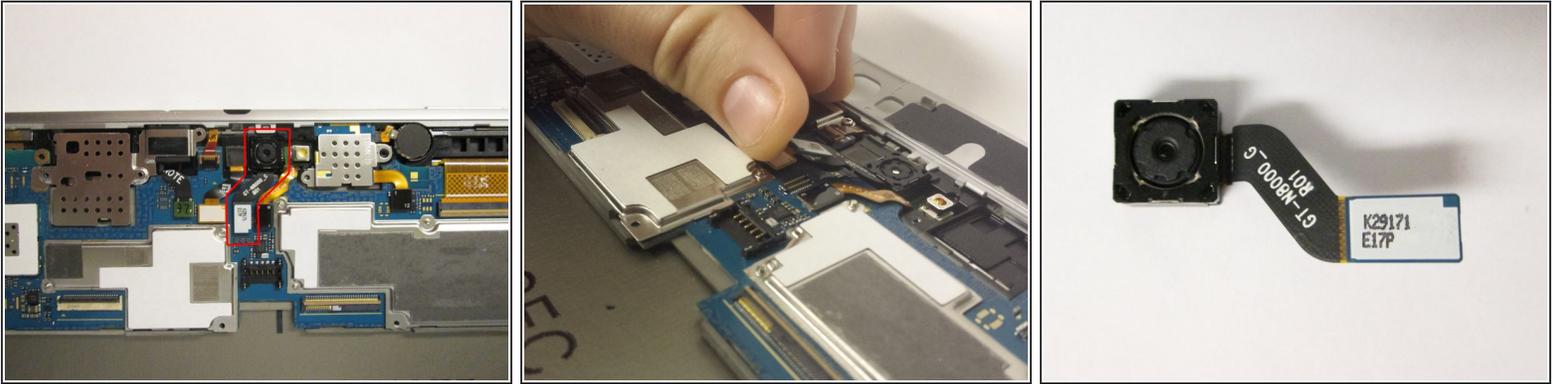

- Start by lifting the white connector to remove the part indicated by the red polygon.
- Gently pry along the camera hub to lift it out of its location.
- This is your camera. Replace it with the new part.

To reassemble your device, follow these instructions in reverse order.