



Acer S200HL LCD Monitor Bundled Cable Connector Replacement

The bundled cable connector is the electronic...

Written By: Jeffrey Kong



INTRODUCTION

The bundled cable connector is the electronic link between the motherboard and the monitor screen.

TOOLS:

Phillips #2 Screwdriver (1)

iFixit Opening Tool (1)

5mm Hex Screwdriver (1)

PARTS:

Bundled cable connector (1)

Step 1 — Removing the Stand



- Place the monitor screen face down.
- Firmly hold the base of the stand with one hand and the bottom of the monitor with the other hand.
- Pull the stand away from the monitor.

Step 2 — Removing the Back Panel



- Use the plastic opening tool to pry the back panel from the front panel.
- Start at one point of the crease and pry along the entire monitor for the best results.

Step 3



- Gently lift the back panel away from the monitor.


Step 4 — Removing Interior Motherboard Casing



⚠ Be sure to keep track of where you place your screws. A [magnetic mat](#) is great for keeping your screws in one spot.

- Unscrew the four 7.5 mm Phillips #2 screws connecting the motherboard to the metal casing.

Step 5

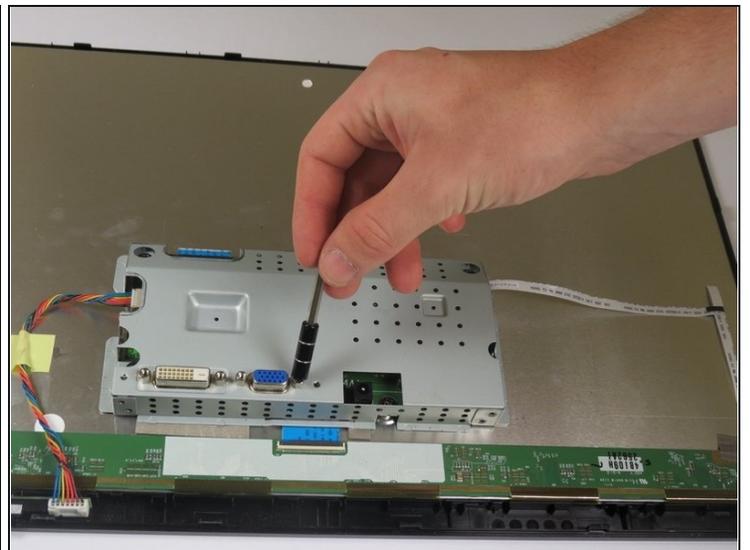


- Remove the four 10 mm hex screws.

Step 6




- Gently lift the motherboard casing from the monitor.

Step 7 — Removing the Bundled Cable Connections

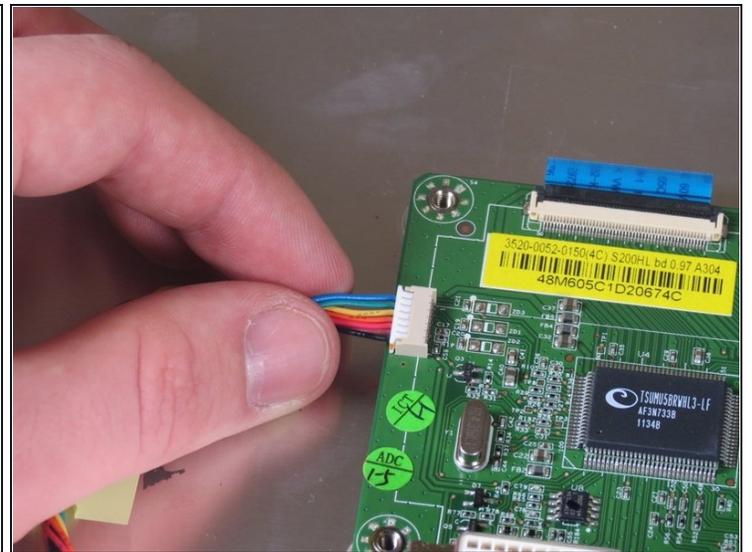

- Pull the bundled cable connector gently away from motherboard.

Step 8

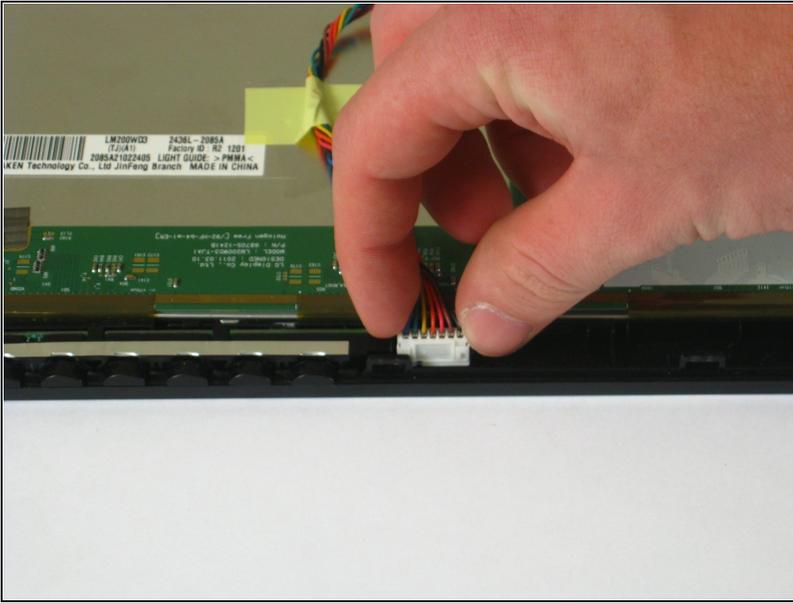

- Grasp the other side of the bundled cable connector and gently pull the connector away from the screen.

To reassemble your device, follow these instructions in reverse order.