



# Samsung T139 Pad Buttons Replacement

Use this guide to replace the pad buttons on your Samsung T139.

Written By: Reagan May



# INTRODUCTION

Use this guide to replace a worn out button pad on your Samsung T139.



## TOOLS:

- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)



## PARTS:

- [Samsung T139 SGH-T139 Pad Buttons](#) (1)

## Step 1 — Remove Back Cover



- ❗ Power off your phone before beginning disassembly
- Apply pressure to the back cover and slide towards the base

## Step 2 — Remove Battery



- With a plastic opening tool, lift and remove the battery




### Step 3 — Remove Screws




- Remove the four Phillips 1.0mm #0 screws

### Step 4 — Remove Black Plastic Cover

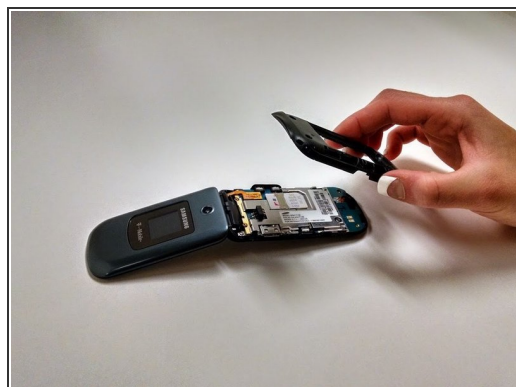


- Using the plastic opening tool, work around the edge of the black plastic cover until it pops off

## Step 5 — Remove Side Buttons

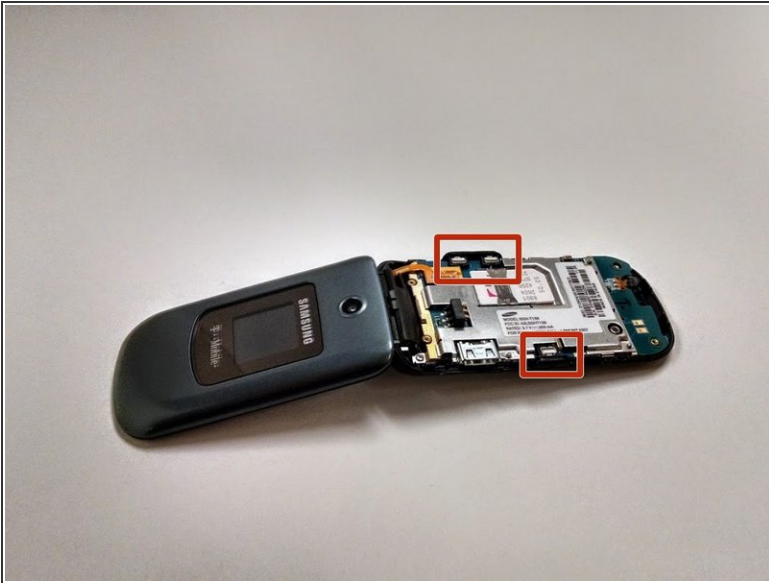


- Remove side buttons by lifting them off the board

## Step 6 — Remove Circuit Board

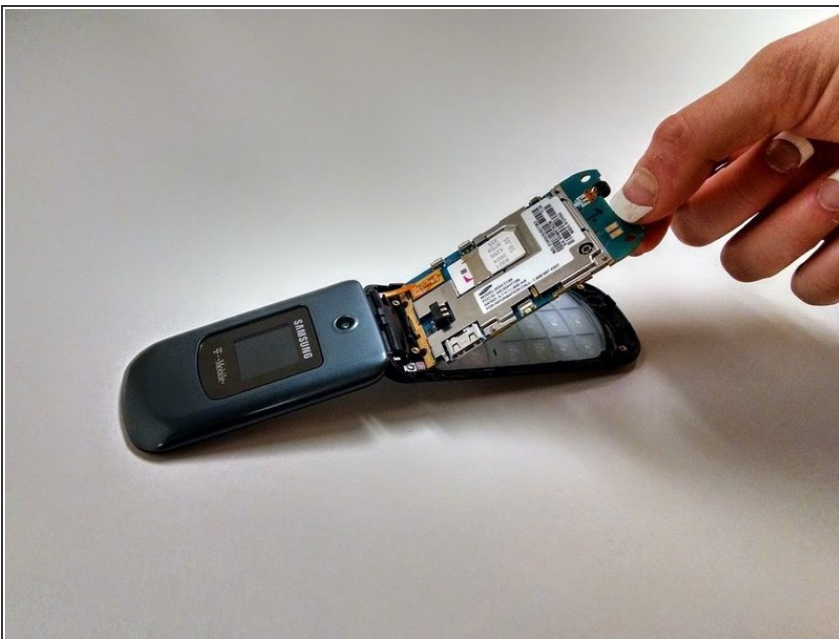

- Lift circuit board up gently
- ⚠ Be careful to not pull ribbon cord apart when removing

## Step 7 — Remove Button Pad

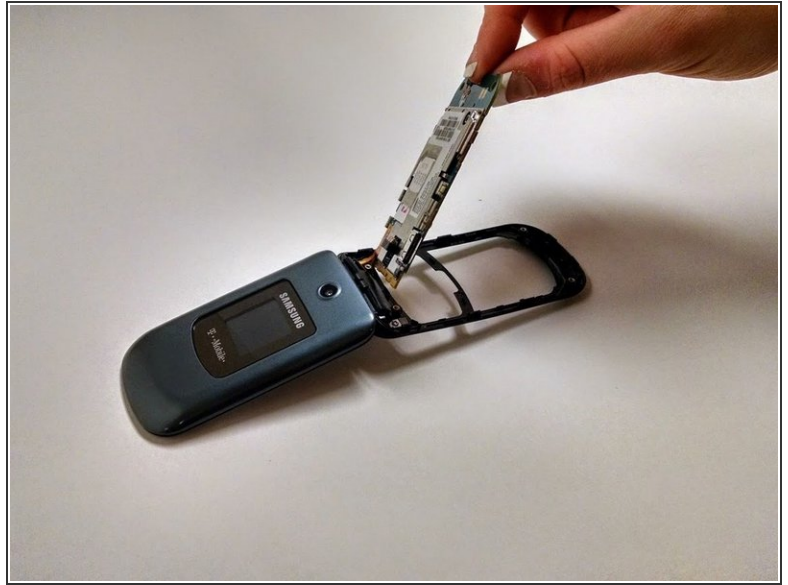

- Lift away button pad

To reassemble your device, follow these instructions in reverse order.