



Nokia E62 Complete Disassembly

How to completely take apart a Nokia E62.

Written By: Jose Gustavo Abreu Murta





TOOLS:

- [Metal Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Nokia E62 Complete Disassembly



- To start, press one of the latches at the top of the phone to open the rear cover.

Step 2



- Carefully press the other latch.

Step 3



- Open rear cover by this side.

Step 4




- Press the three latches to open this side of the cover.

Step 5



- Remove the rear cover.

Step 6

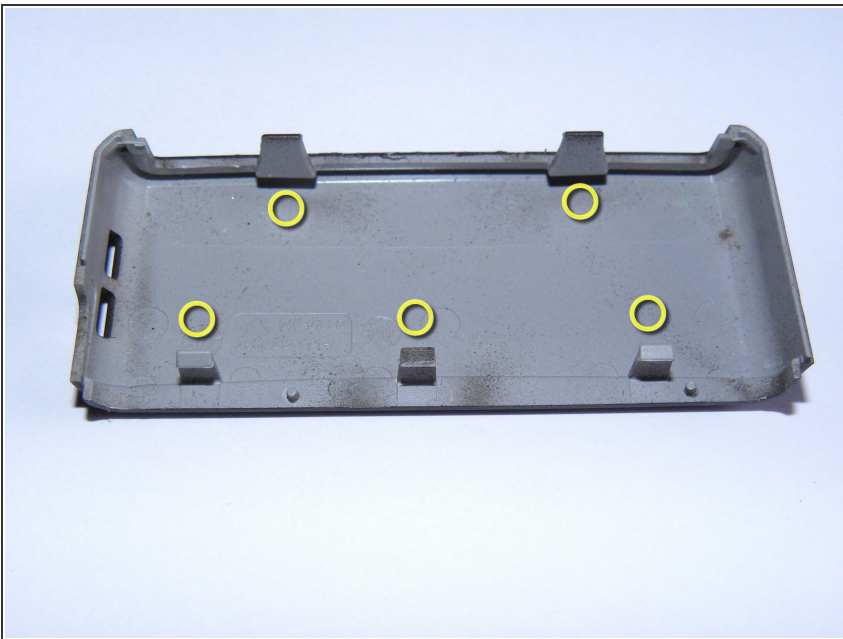


- Removed rear cover. See the latches .

Step 7




- Remove the screws using Torx T6 screw driver.

Step 8

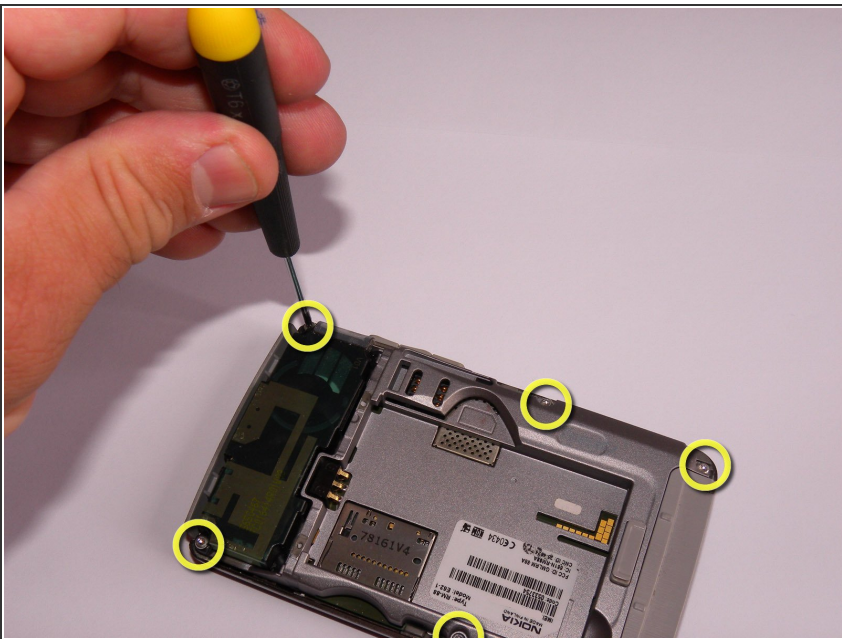


- Remove six T6 screws.

Step 9

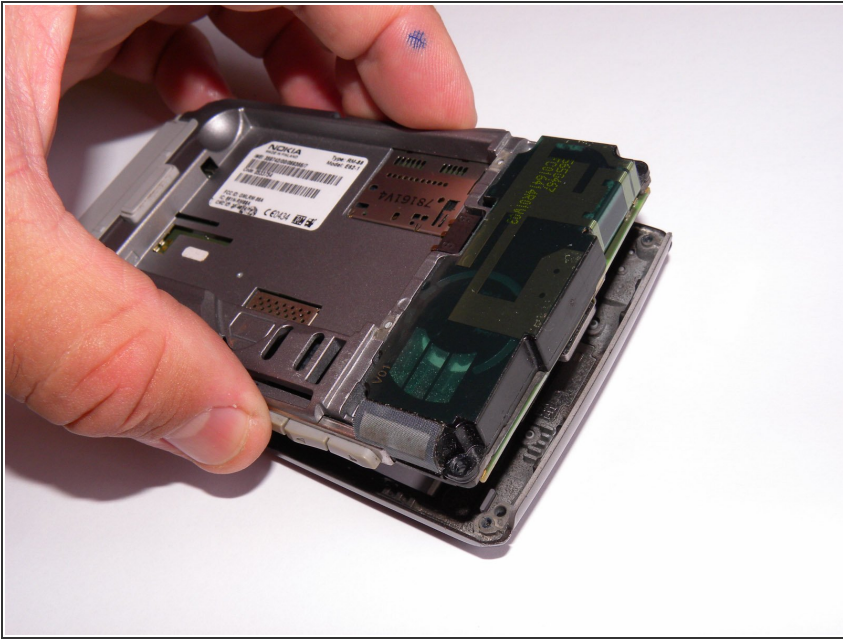


- Remove the assembly. The front cover will be released.

Step 10

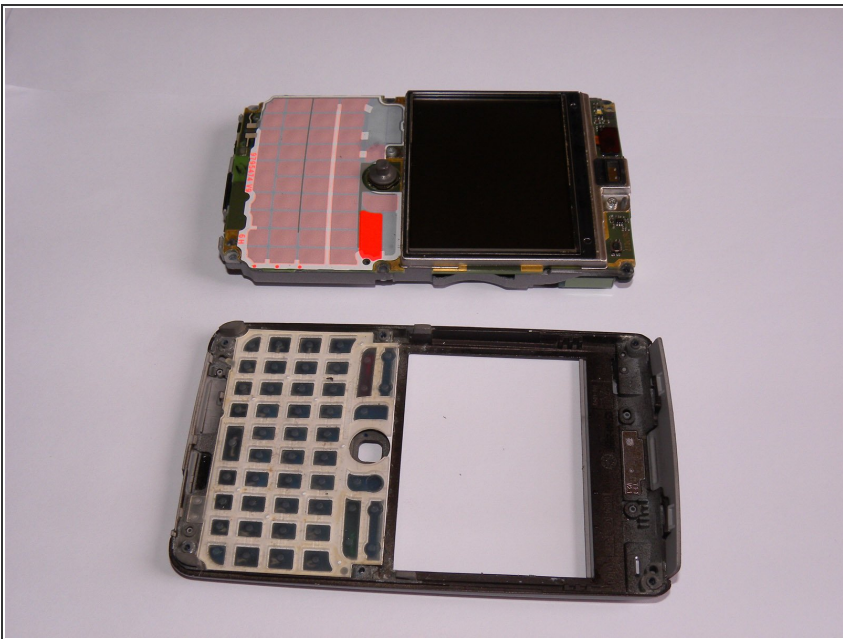


- The front cover released.

Step 11

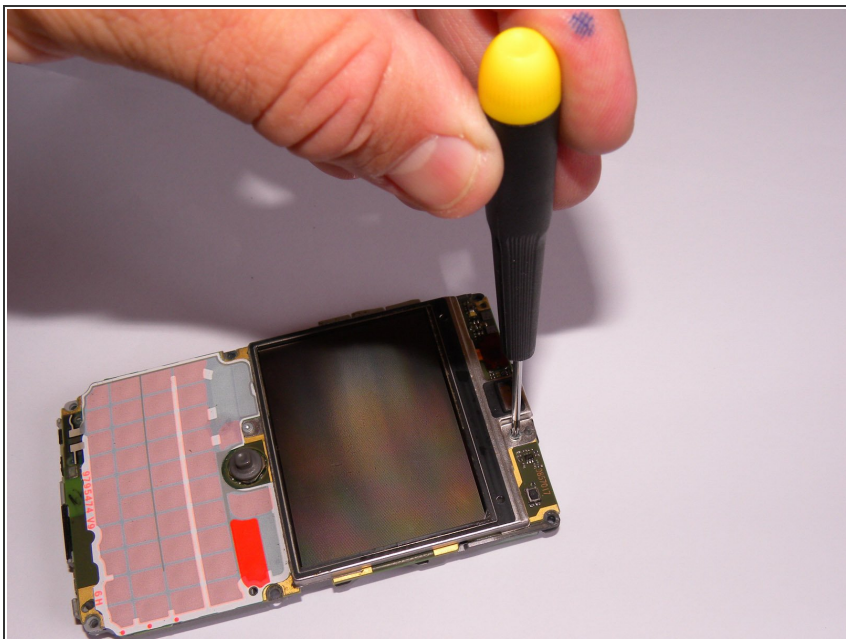

- To remove the display , unscrew the T6 Torx at top.

Step 12

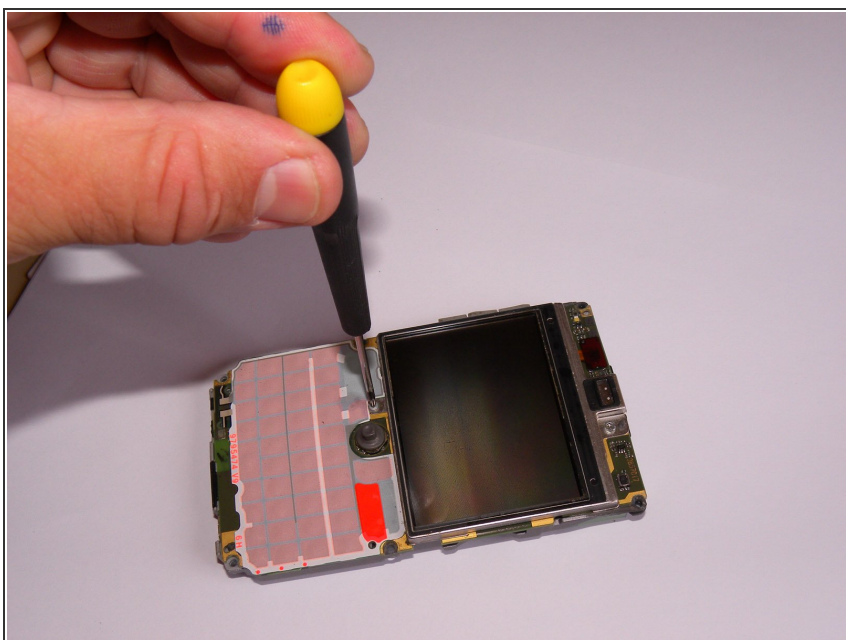


- ⚠ CAUTION! Remove the bottom screw with T5 Torx screw driver, not T6 !

Step 13




- Carefully disconnect the Flex cable connector. Then remove the display.

Step 14

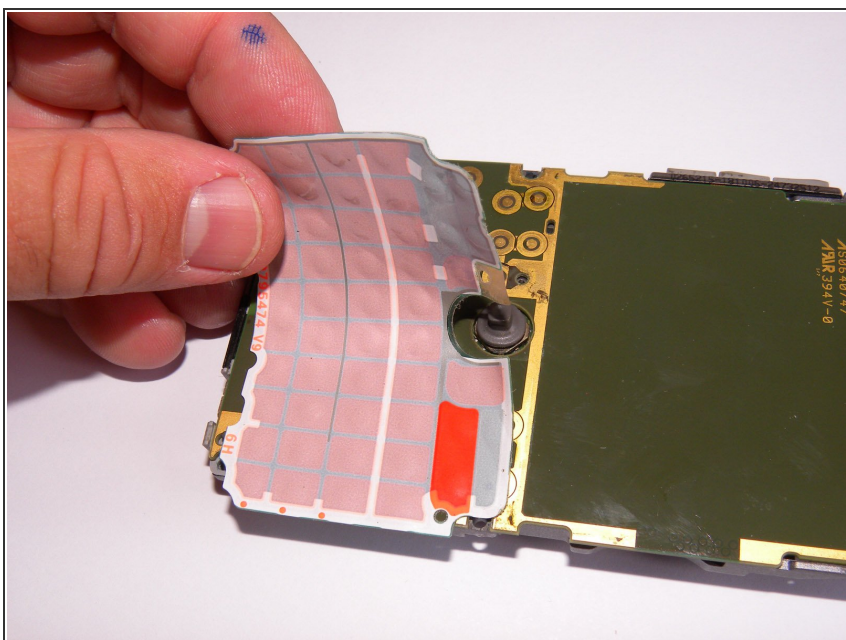

- Carefully remove the adhesive keyboard membrane.
- ⓘ You can replace it at this step if you need to.

Step 15

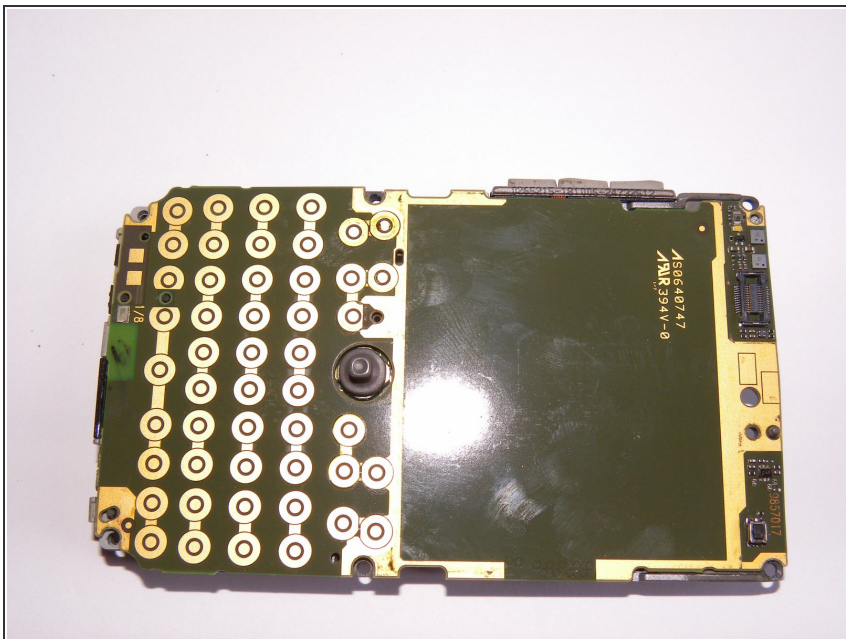


- You can clean the keyboard surface with alcohol, if you dropped a drink here.

Step 16



- When you replace the keyboard membrane, align the two contacts at bottom.

Step 17

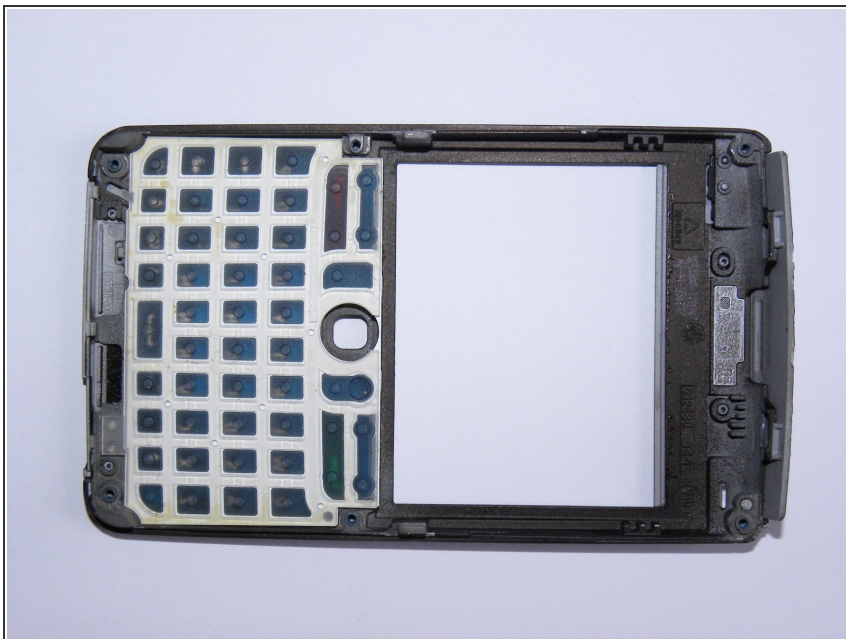


- You can wash the front cover and keyboard if they are dirty.

Step 18




- Keyboard - clean it if necessary.

Step 19

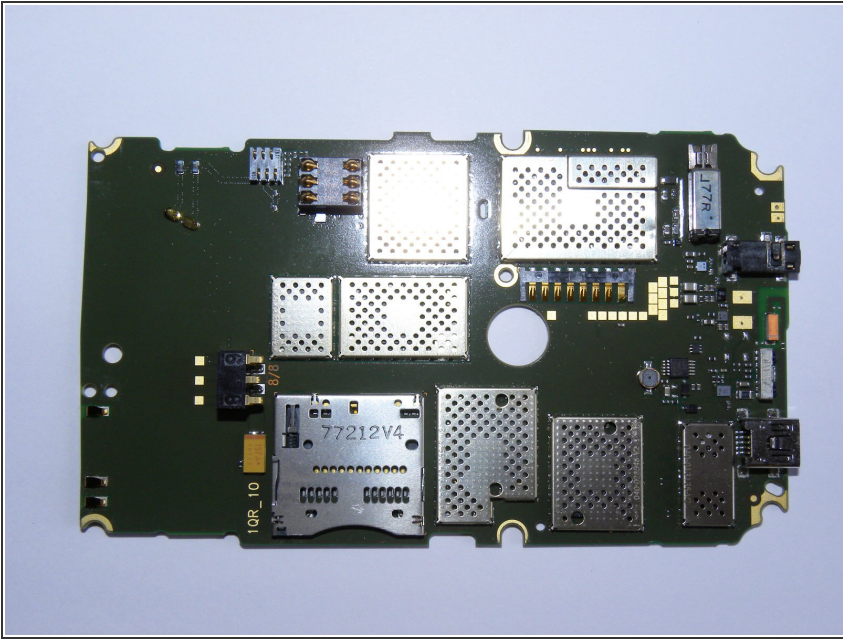


- Rear side of the circuit board.

Step 20

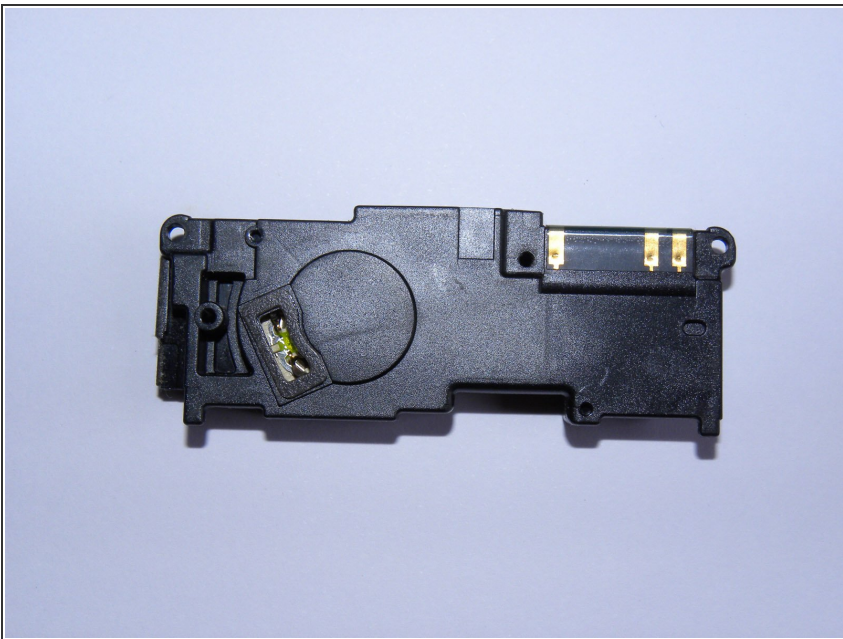

- Speaker and antenna contacts.

Step 21

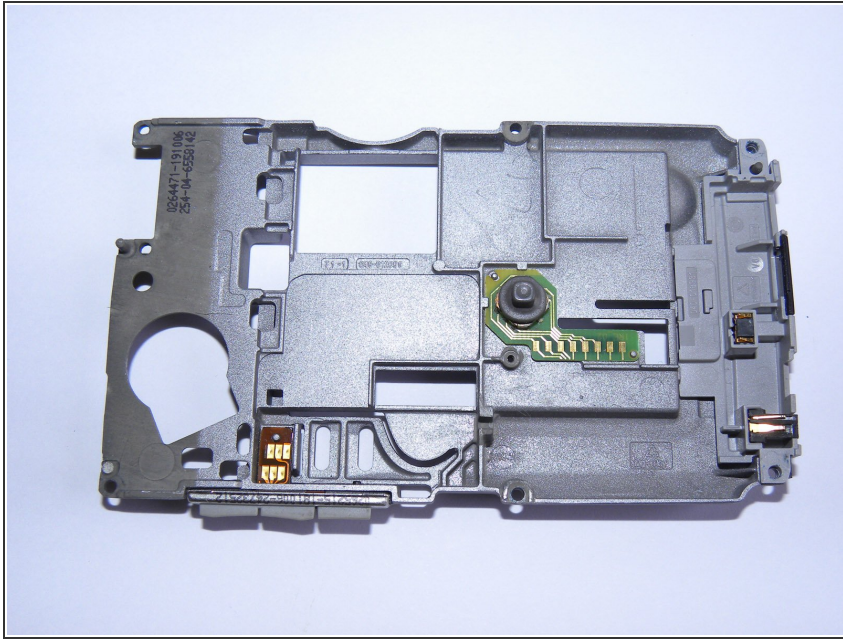

- If necessary, you can replace the joystick, the button module or the connector housing.

To reassemble your device, follow these instructions in reverse order.