



# Trio STEALTH-9 Back Cover Replacement

How to replace a Trio STEALTH-9 back cover.

Written By: Mei Liang



## INTRODUCTION

This guide will describe how to remove the back cover to your Trio STEALTH-9 and replace a new one in its place. This process should not take too long and will only require the removal of a few screws and a careful hand with the plastic shell.



### TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)



### PARTS:

- [Trio STEALTH-9 Back Cover](#) (1)

## Step 1 — Back Cover

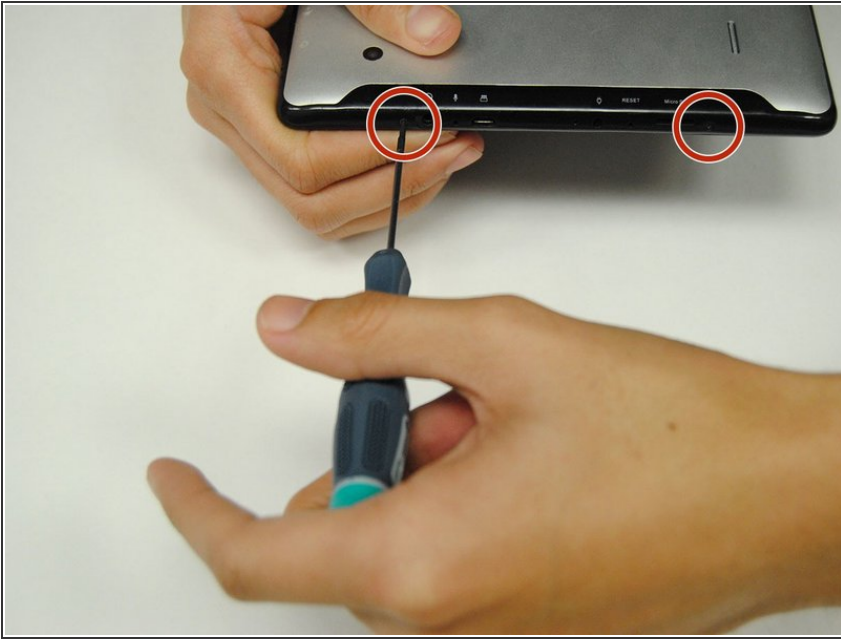


- Remove the two Phillips #00 screws on the side of the tablet.

## Step 2



- Take one of the plastic opening tools and wedge it in the middle of the tablet, starting on the USB Port side.
- Holding the tool in place, take one of the 6 plastic opening picks and slide it across the opening you made with the opening tool.

### Step 3

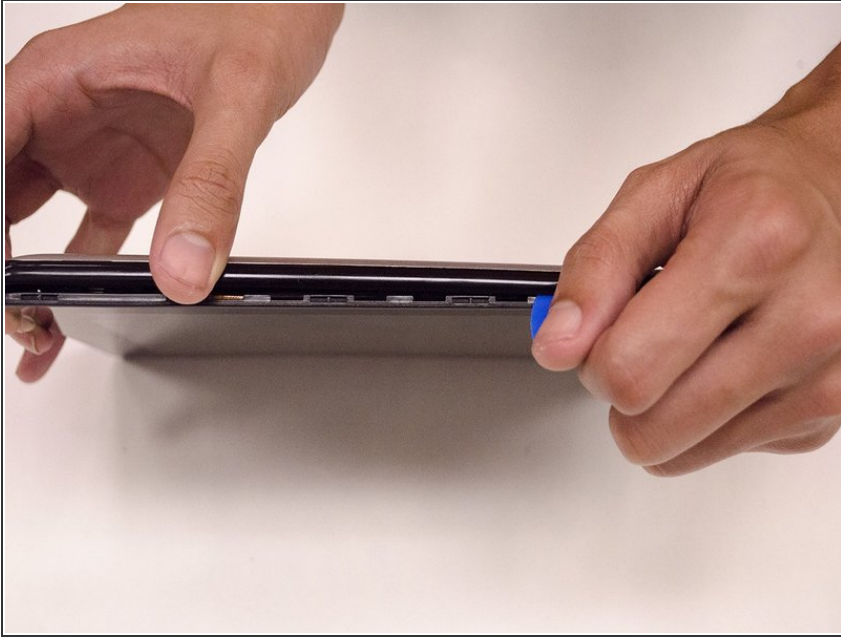

- Continue going around the tablet sides with the plastic pick, being sure that you are maintaining the openings you made with either your hand or the opening tool.

**i** You will notice some popping as you go around with the pick. Don't worry, this is completely normal.

### Step 4



- Remove the back cover of the tablet to reveal the internals.

**★** To replace, pinch each of the ends together until all four sides are closed.

To reassemble your device, follow these instructions in reverse order with your replacement cover!