

Samsung Galaxy Note5 rear camera & front camera & earpiece Replacement

Samsung Galaxy Note 5 rear camera replacement, front camera replacement and earpiece replacement share most the same steps, so show them together.

Written By: Sophia



INTRODUCTION

[video: https://www.youtube.com/watch?v=CQjNBUDEOio]



TOOLS:

- Heat Gun (1)
- iFixit Opening Picks set of 6 (1)
- Suction Handle (1)
- Phillips #000 Screwdriver (1)
- Spudger (1)



PARTS:

- Galaxy Note5 Rear Camera (1)
- Galaxy Note5 Front Camera (1)
- Galaxy Note5 Earpiece Speaker (1)

Step 1 — Rear camera & front camera & eapiece







Remove SIM card tray.

Step 2







Remove S Pen.







Guide ID: 51169 - Draft: 2019-04-29

Remove back cover.

Step 4





Remove screws.







Remove middle housing.

Step 6







 Remove battery. But it's not necessary. You also can just release battery connector from motherboard.










Release the connector on the board.

Step 8

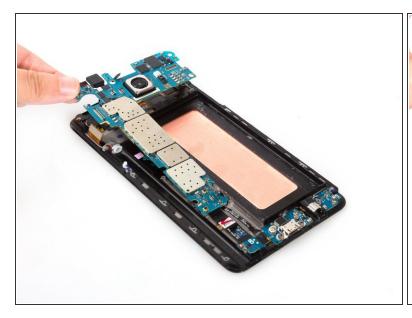

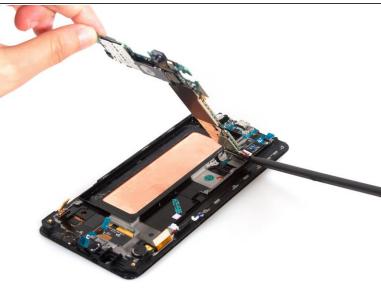


Release the USB board connector on the back and remove the motherboard from front assembly.

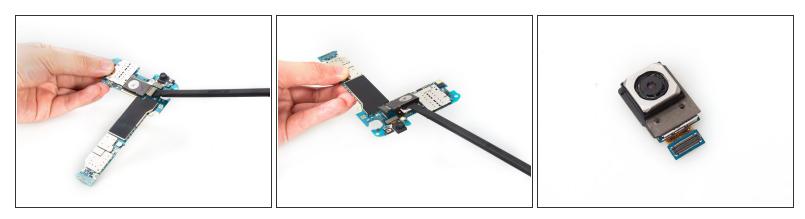

Remove rear camera.

Step 10

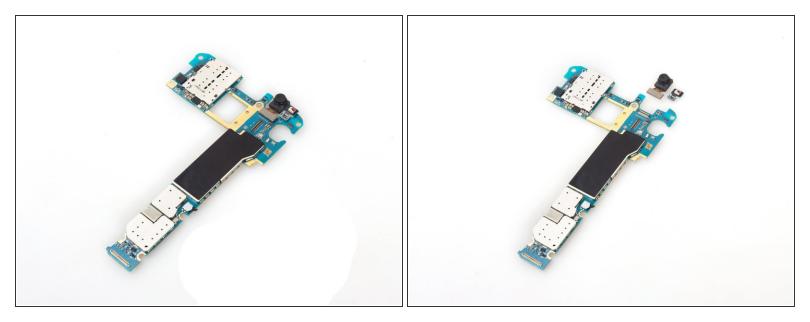

Remove front camera and noise-canceling mic.







Remove earpiece assembly.

Step 12



That's earpiece with sensors.

To reassemble your device, follow these instructions in reverse order.