



HTC Desire 610 Battery Replacement

In this guide, we will show you how to replace the battery in an HTC Desire 610 smartphone.

Written By: Alex Martin



INTRODUCTION

Is your HTC Desire 610 not holding a charge? Instead of taking it to your phone provider, follow these steps and you can replace that old battery in no time! It's as simple as: take off the back, unscrew the circuit cover, pry out the old battery, and put in a new one. Ta-dah!



TOOLS:

- [Phillips #000 Screwdriver](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- Open the SD card slot.

Step 2



- Using plastic opening or prying tool, take off the back cover of the phone.
- The SD slot opens an area where the edge of the back is exposed and can be pried open easily.

Step 3



- Using Phillips 000 Screwdriver, remove the two 2.5mm phillips head screws.

Step 4




- Using Torx T5 screwdriver, remove the four silver 5mm torx head screws.

Step 5




- Using Torx T5 bit size, remove the four black 4mm torx screws

Step 6

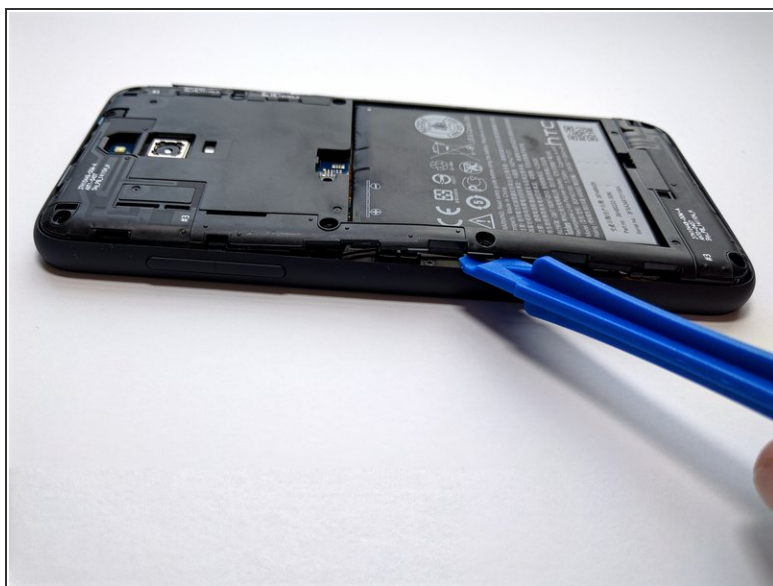

- Using plastic opening or prying tool, remove the black plastic circuit cover.

Step 7

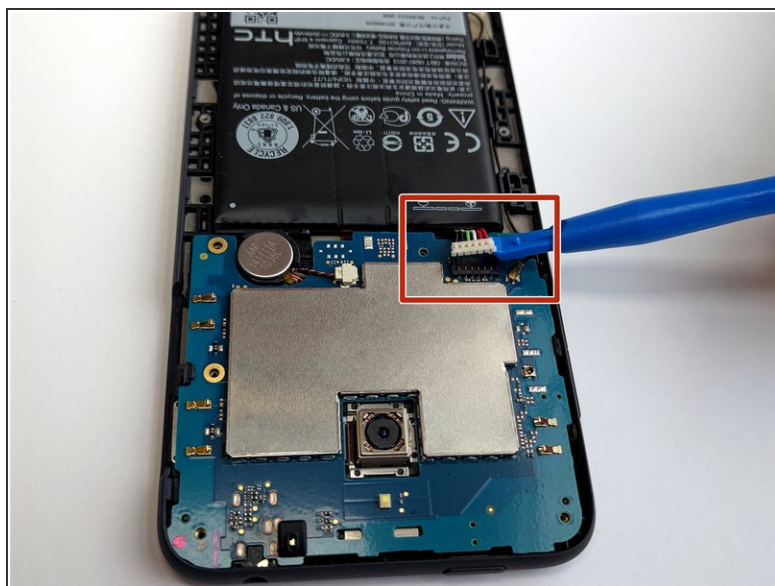

- Using small plastic opening tool, disconnect the wire connection. Do this by carefully inserting tool under wires and pulling straight up.
- ✦ You may need to pry from both sides of the wires to remove the connection.
- ⚠ Be careful! Damaging the connection port could prevent a new battery from working.
- ✦ When inserting a new battery, press firmly on the white connector to snap it into it's port.

Step 8



- Use the plastic opening tool - you can use a larger one, or keep using the small one - to pry out the battery.
- ☑ The battery is glued in with adhesive, so you may have to pry a little hard.

To reassemble your device, follow these instructions in reverse order.