



Motorola XOOM 2 Media Edition Battery Replacement

Replace your dead battery, returning the tablet to a functional state.

Written By: Taylor



INTRODUCTION


Having troubles charging, holding a charge or keeping your device powered on? This guide will help you replace your battery. You will need to purchase a new battery before beginning.

TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T3 Torx Screwdriver](#) (1)
 - [T5 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-


Step 1 — Battery



-  Power off your tablet before beginning disassembly.
- Remove six 2.74mm Torx #3 screws from the back panel of the device with a Torx T3 screwdriver.


Step 2



 There is adhesive attached to the underside of the back panel. Gradually lift panel to avoid bending it out of shape.


- Pry off the back panel with a plastic opening tool.

Step 3

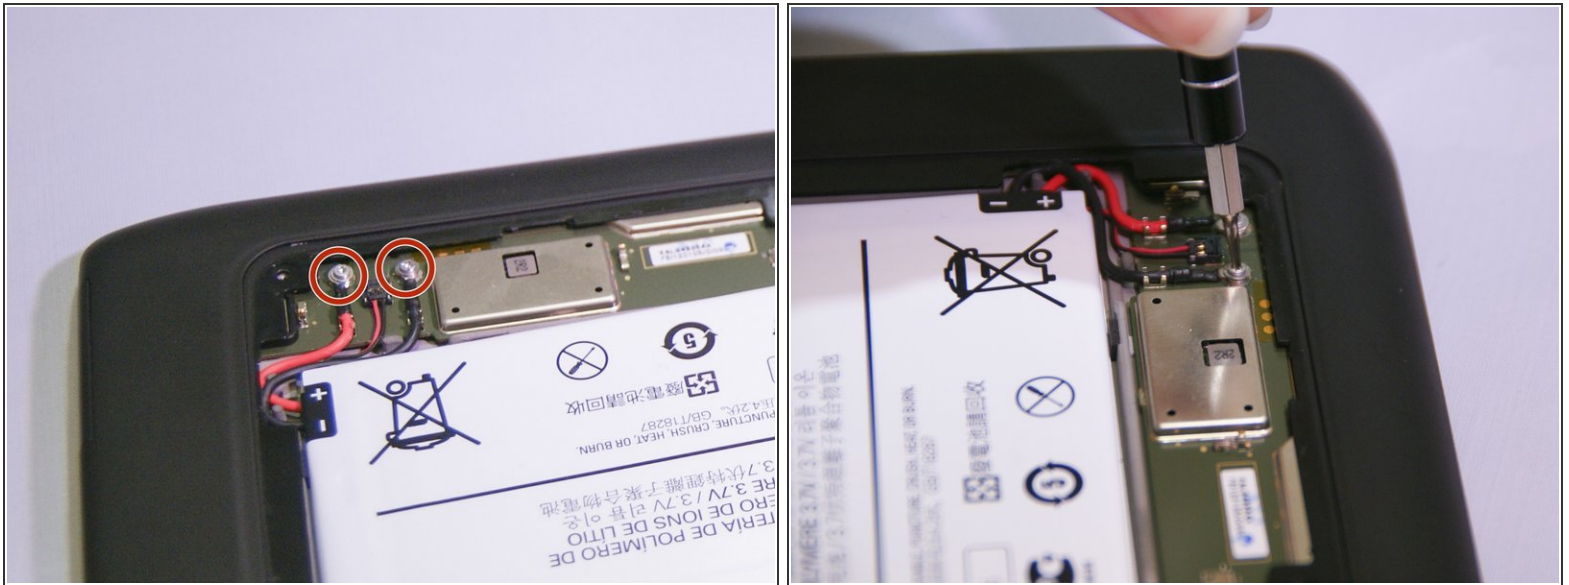


- ⚠ These screws are tight and prone to becoming stripped.
- ⚠ The battery cables are likely to snap when removing the screws.
- Remove two 2.38mm Torx #5 screws from battery cables with Torx T5 screwdriver.

Step 4

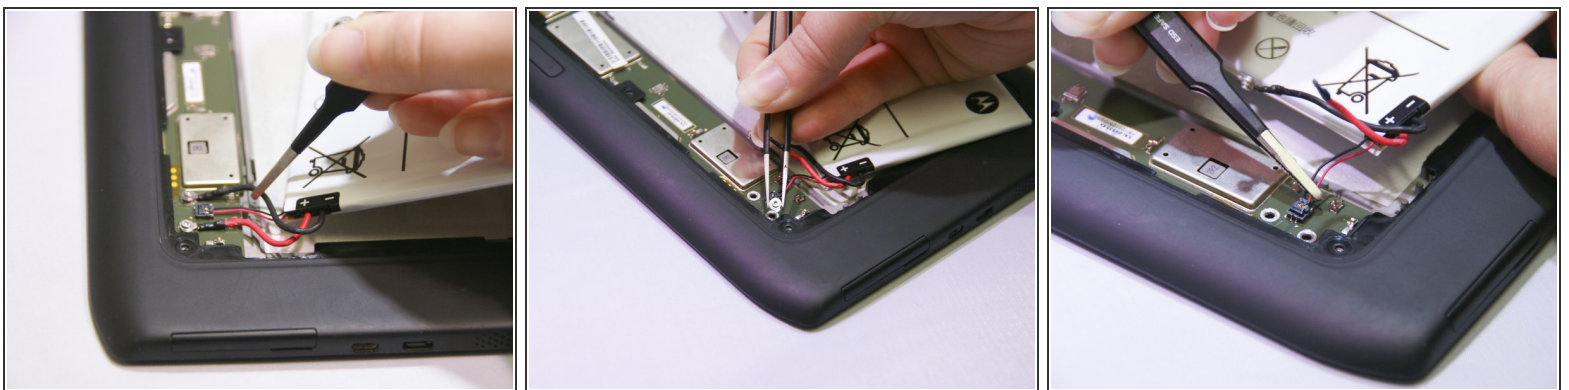

- Pull up the battery cables and battery chip with tweezers.

Step 5

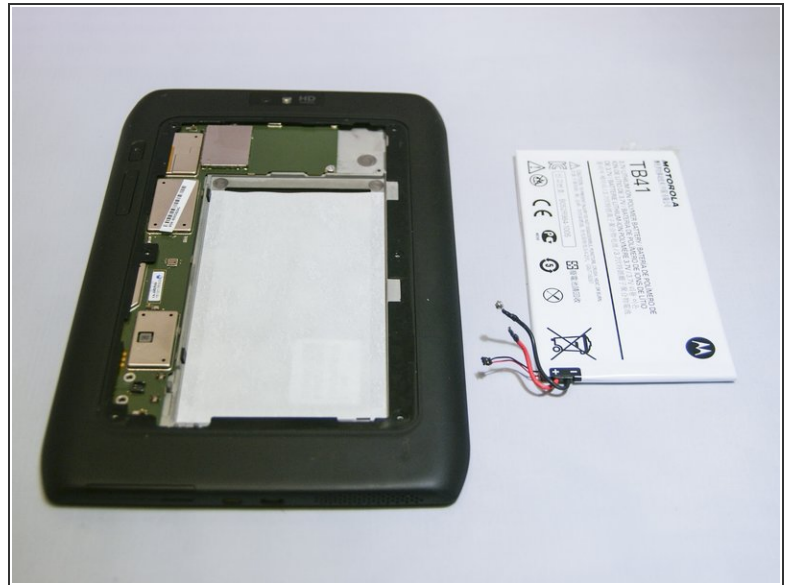

- Pry the battery out of the device with the plastic opening tool.
- ☛ Some force is needed to lift the battery up because of the adhesive attached to the backside of the battery.

To reassemble your device, follow these instructions in reverse order.