




Motorola XOOM 2 Media Edition Microphone Replacement

This guide will explain how to replace the speakers on your device.

Written By: Jillian Cain

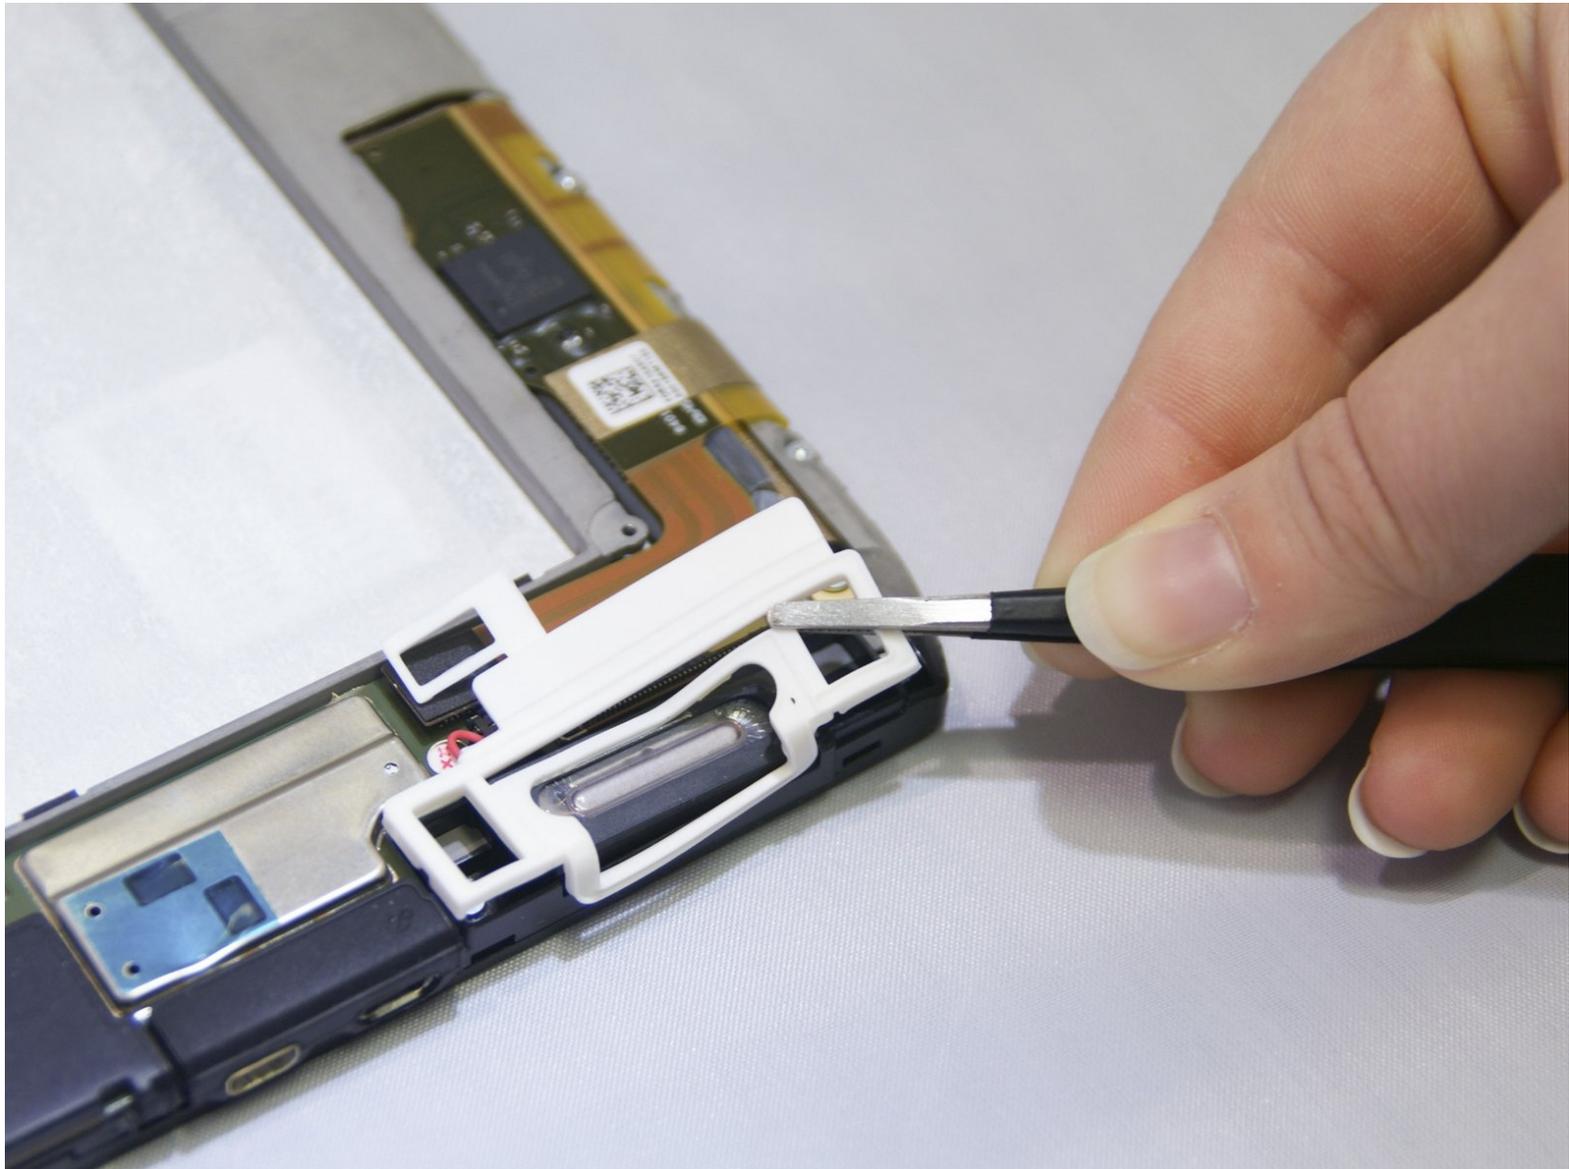

INTRODUCTION

Is your microphone not working? Here is a guide to replace the microphone. You will need to purchase a new microphone before beginning.

TOOLS:


- [iFixit Opening Tools](#) (1)
 - [T3 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Motorola XOOM 2 Media Edition Disassembly



- i** Power off the device before beginning disassembly.
- Remove six 2.7mm Torx #3 screws.

Step 2

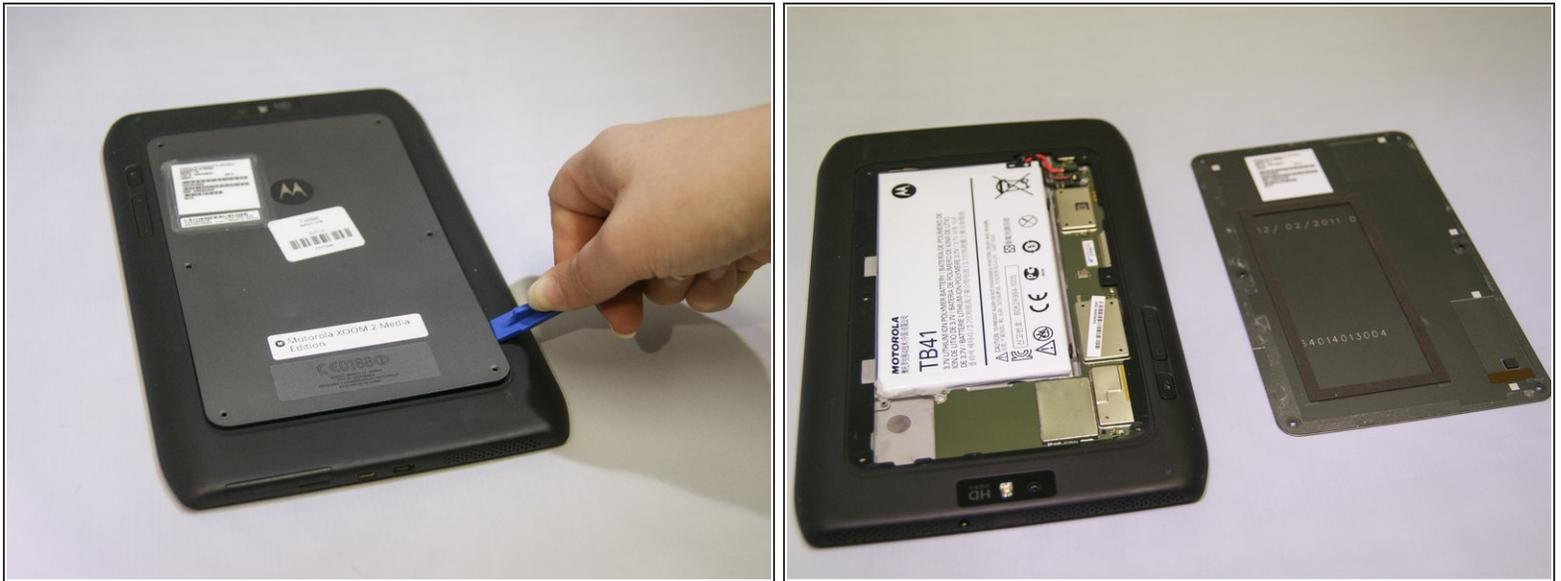

! There is adhesive attached to the underside of the back panel. Gradually lift the panel to avoid bending it out of shape.


- Pry off the back panel using a plastic opening tool.
- Using a plastic opening tool, slide the tool gently around the back cover to lift the cover off.

Step 3




- Pry off the black cover gradually using a plastic opening tool.

Step 4 — Microphone

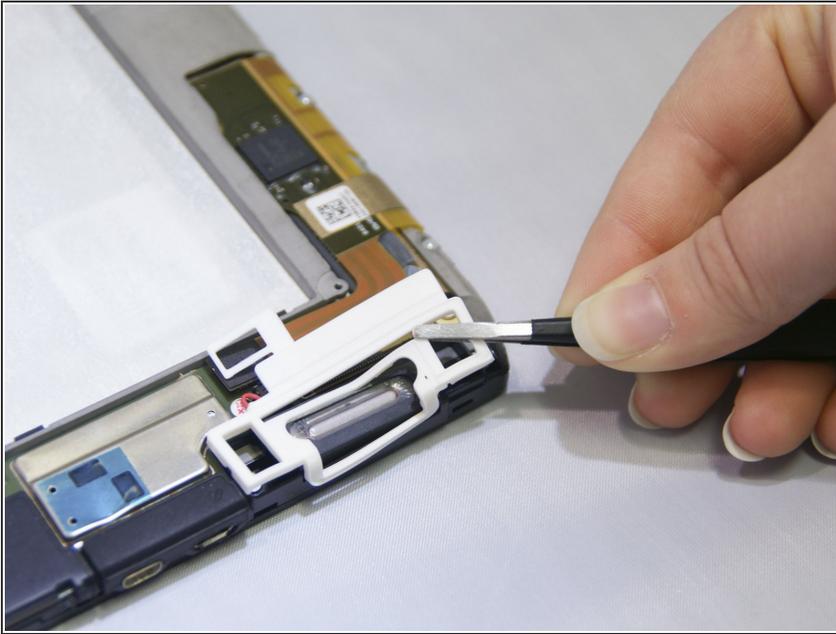



- Gently pull up rubber housing with tweezers from above microphone.
- ⓘ There is adhesive holding down the rubber microphone housing.

Step 5

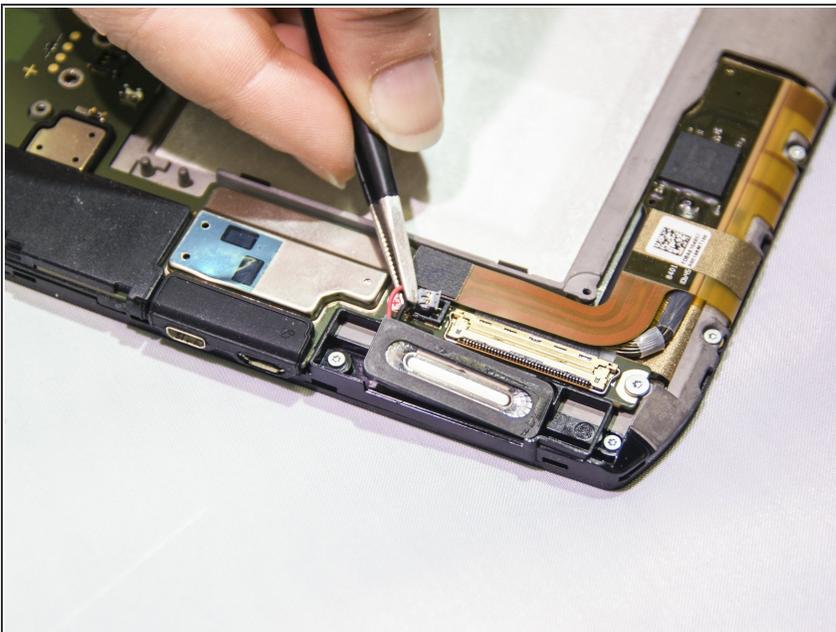

- Using the tweezers, gently pull up the connector off the microphone.

Step 6

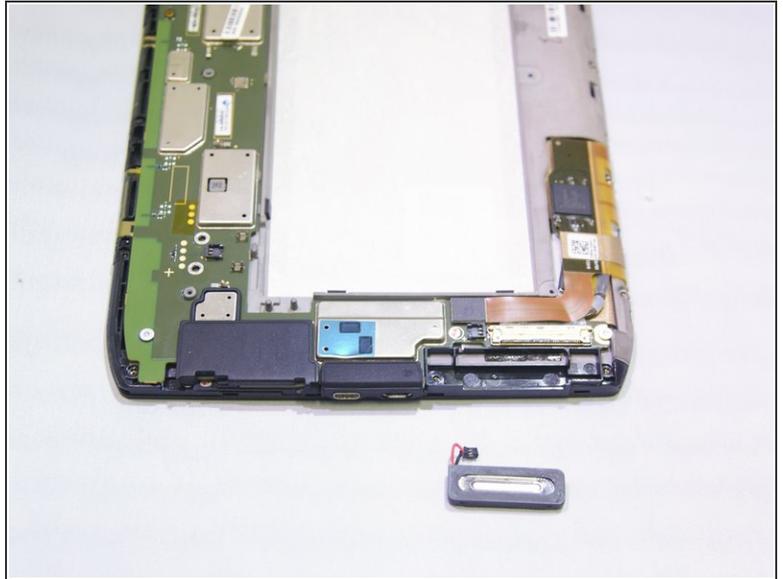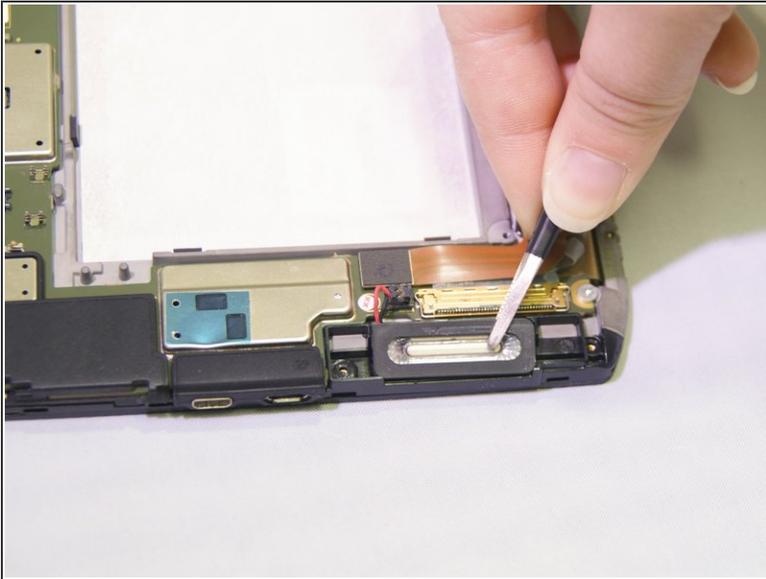

- Once the connector is removed, use the tweezers to pull up the microphone from its plastic socket.

To reassemble your device, follow these instructions in reverse order.