




Dell Inspiron 14 M4010 Memory Modules Replacement


Written By: Terrence15

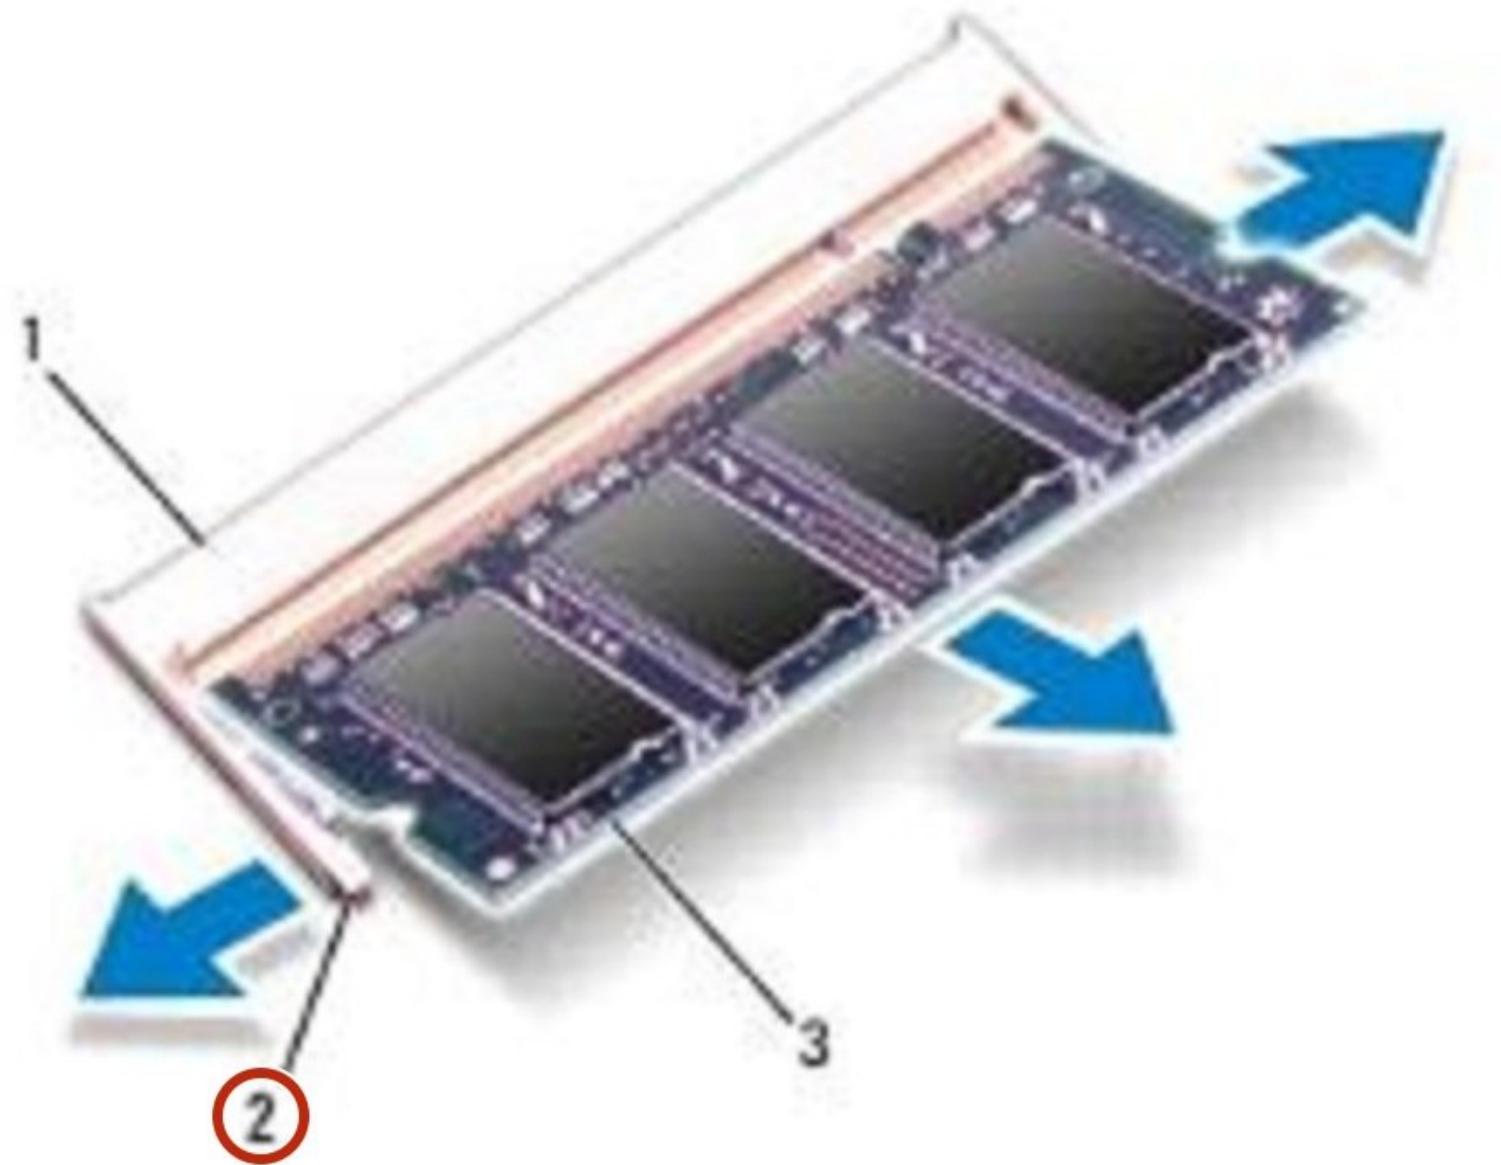

INTRODUCTION

In this guide, we will be showing you how to remove and replace the Memory Modules.

Step 1 — Popping up the Memory Module

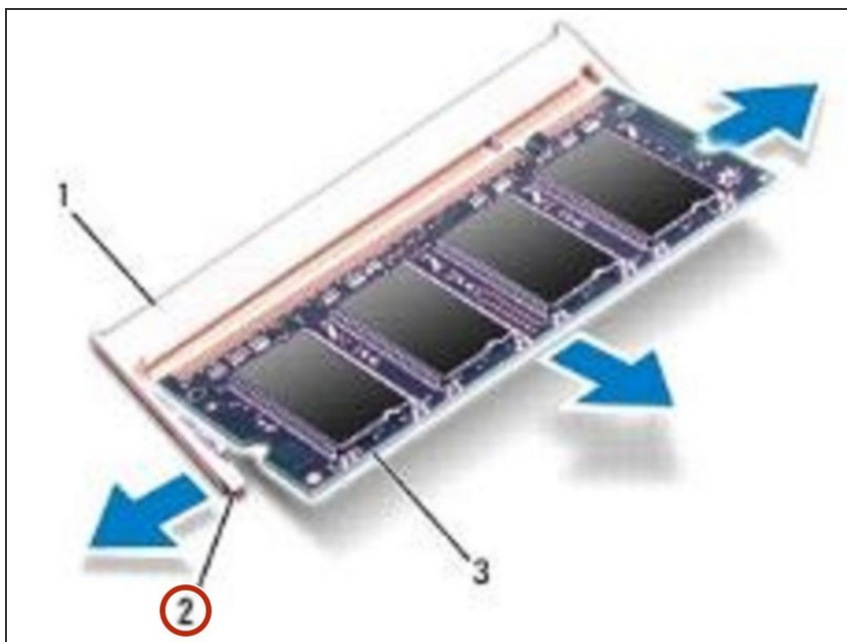


WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).

CAUTION: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).

CAUTION: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.

- Use your fingertips to carefully spread apart the securing clips on each end of the memory-module connector until the module pops up.


Step 2 — Remove the Memory Module

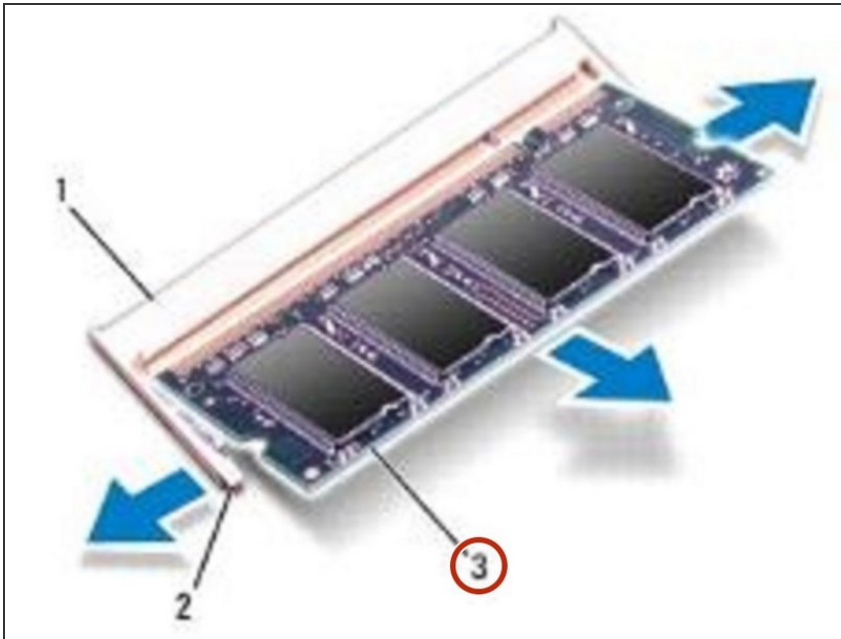

- Remove the memory module from the memory-module connector.


CAUTION: If you need to install memory modules in two connectors, install a memory module in the connector labeled "DIMM A" before you install a memory module in the connector labeled "DIMM B."

Step 3 — Align the Notch

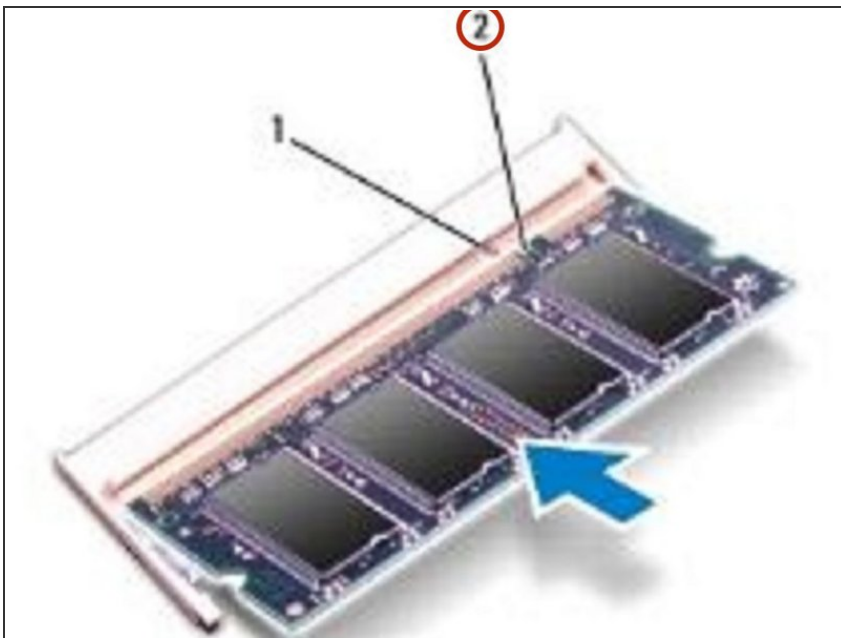

- Align the notch in the **NEW** memory module with the tab in the memory-module connector.

Step 4 — Installing the Memory Module

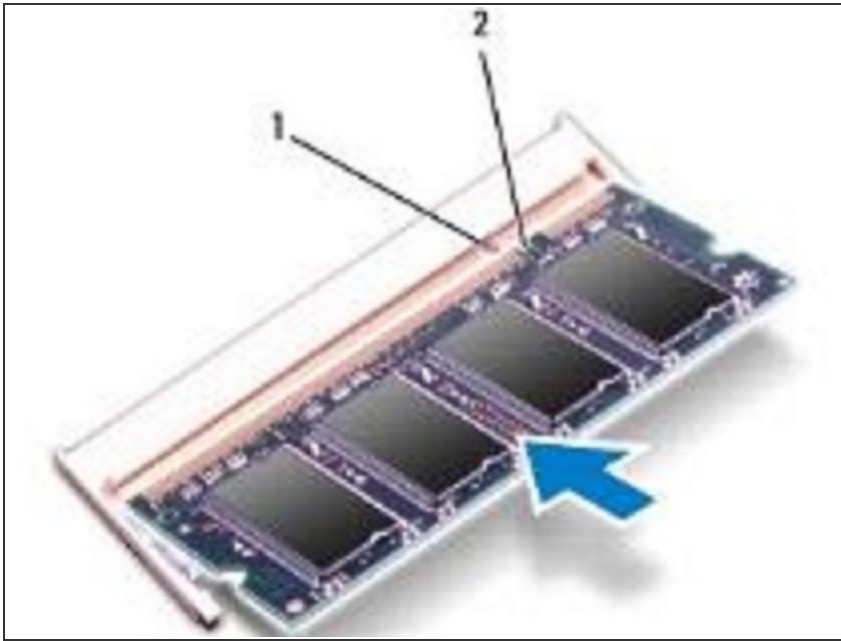

- Slide the memory module firmly into the slot at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.

ⓘ NOTE: If the memory module is not installed properly, the computer may not boot.