

INTRODUCTION

For this guide you will remove the back cover and battery cover in order to replace the battery.


TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [Spudger](#) (1)

PARTS:


- [3 volt CR2032 Rechargeable Battery](#) (1)

Step 2

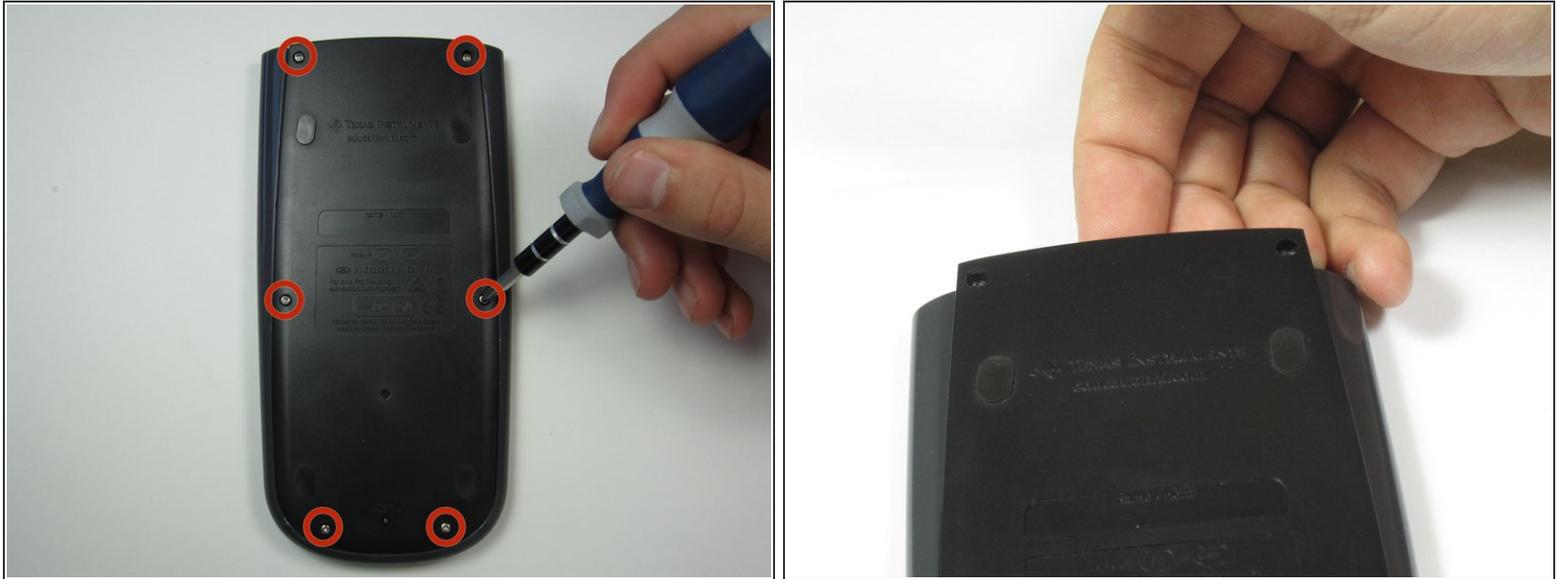


- Using a Phillips #1 screwdriver, remove the six 6mm screws from the back of the case and place them to the side.
- Start from the notches on the top edge and use your fingers or a prying tool to carefully pry the back cover from the calculator.

Step 3 — Battery

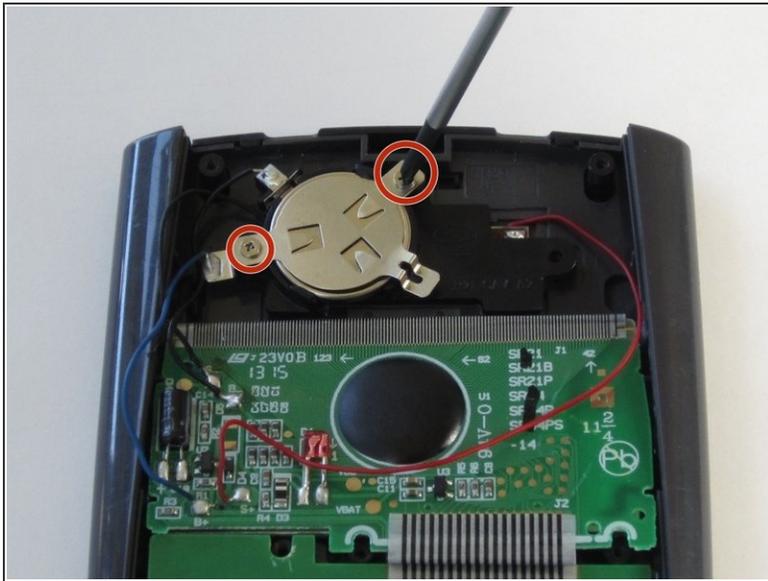

- Use a Phillips #00 screwdriver to remove the two 7.5 mm screws holding the battery cover to the case.
- ⚠ Remove the battery cover without disconnecting either end of the blue wire.
- Use your finger to move the battery cover to the side.

Step 4

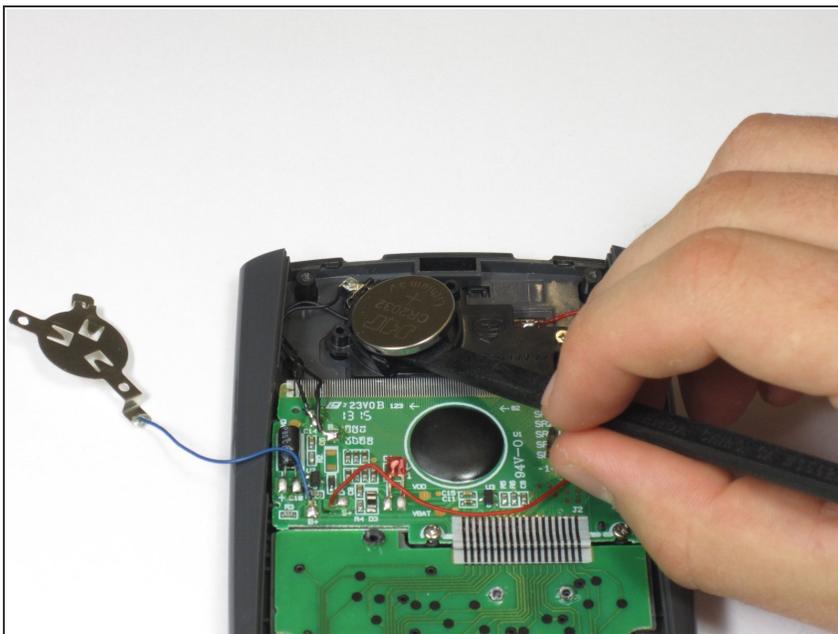

- Use the flat side of a spudger to remove the battery by lifting the bottom edge.
- ☑ When inserting a new battery, check the polarity (+ or -) and insert the new battery with the + side on top.

To reassemble your device, follow these instructions in reverse order.